

CUSTOM ENGINEERED SWITCHES AND TRANSDUCERS

Engineered Solutions
for The Most Severe
Pressure, Vacuum and
Temperature Applications

NASON
NEW THINKING


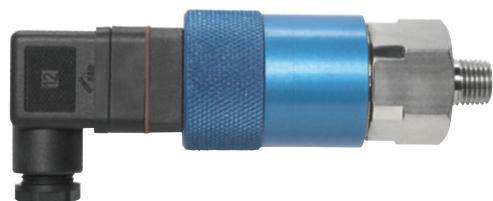


TABLE OF CONTENTS

8

PRESSURE SWITCHES

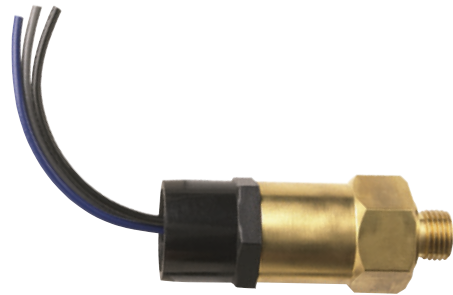

9	SQ	Low Pressure Switch
10	SM	Low Pressure Switch
11	MM	Low Pressure Switch
12	LM	Low Pressure Switch
13	CJ	Low Pressure Switch
14	XM	High Pressure Switch
15	WX	High Pressure Switch
16	CD	High Pressure Switch
17	CF	High Pressure Switch (Fixed Set Point)

18

VACUUM SWITCHES



19	VM	Vacuum Switch
20	JV	Adjustable Vacuum Switch
21	VF	Fixed Vacuum Switch
22		Pressure / Vacuum Switch Optional Configurations
23		Pressure / Vacuum Switch Media Connection Designations
25		Pressure / Vacuum Switch Application Worksheet

26

TEMPERATURE SWITCHES



27	TT	Temperature Switch
28	TD	Temperature Switch
29	TM	Temperature Switch
30	HT	Temperature Switch
31	TW	Temperature Switch
32		Temperature Switch Media Connection Designations
34		Temperature Switch Optional Configurations
35		Temperature Switch Application Worksheet

TRANSDUCERS



38	NT25	Transducer
40	NT40	Transducer
42	NT41	Transducer
44	NT100	Transducer
46	NT110	Transducer
48	NES	Electronic Pressure Switch w/Relay Output
50	NESD	Pressure Switch/Transducer
52	NTBT	Pressure Transducer with Wireless Bluetooth
54	NTBT-DL	Pressure Transducer with Wireless Bluetooth & Data Logging
56	NTS	Temperature Transducer
58		Wiring Diagrams
59		Cable Assemblies

RESOURCES

7	Basic Electrical Connection Options
60	Diaphragm Compatibility
61	Conversion Tables
62	Glossary of Terms

NEW THINKING


FOR BETTER SOLUTIONS

After more than seventy years of producing quality electrical, hydraulic, and pneumatic components for use in military and industrial applications, we've established ourselves as industry leaders in efficiency, flexibility, and customer service. Our line of custom engineered switches offers proven reliability and unmatched customization.

Parts made by Nason are used around the globe in the harshest of environments, where engineers and users depend on the precision and reliability we promise to each of our clients. Our switches undergo rigid testing to ensure reliable service. We leave nothing to chance, crafting and assembling all parts within our own plant in the United States.

Our offering of options in ratings, connections, and mounting is unmatched in the industry. Besides our extensive stock of legacy switches, we keep an incredibly diverse supply of optional media and electrical connections to match our clients' varied design specifications. Whatever your challenge, our technical support is available to you before and after the sale.





Our 70,000-square-foot manufacturing facility, staffed with experienced design engineers and customer service representatives, exists solely to meet your engineering needs, big or small. We offer free switch samples to let you make sure that our customized design fits your particular application, so you can specify Nason with confidence. And we require no minimum orders, so even the smallest design challenge is no problem. Once you've looked over our products' 3D CAD models and have made your design decisions, our extensive component inventory will ensure rapid assembly, often shipping products within days.

Contact Nason to see how our custom engineered switches can fit your exact application.

The Nason logo, featuring the word "NASON" in a bold, blue, sans-serif font. The letter "O" is stylized with a white circle in the center, resembling a target or a lens.

NASON SWITCH

DESIGNS ENSURE HIGH RELIABILITY

All of Nason's pressure switches use a snap-action electrical device activated by an elastomer diaphragm or piston, offering a precise and repeatable design. The snap-action design will maintain its state with contacts either open or closed, until a precise set point is reached when it will snap over center to a new state. It will remain in that state until a distinct change towards its original setting is sensed, at which time it will snap back to its original state. The design's snap-action feature prevents contact intermittency near its switch point, which is common in creeper designs. As system pressures fluctuate, our switches' inherent differential prevents searching. Nason uses only the highest quality snap-action switches. These switches and Nason's are UL, CSA, and military approved.

ACCURACY

Our elastomer diaphragm or piston, which moves a precise .040 of an inch, ensures accurate, instantaneous contact under all operating conditions. While nitrile is preferred for general use, we can also provide ethylene propylene, fluorocarbon, fluorosilicone, and neoprene, depending on your need. Nason tests 100% of its switches for accuracy.


RELIABILITY

Under most operating conditions, Nason switches have an operational life of over one million cycles. Smart design, quality components, and careful assembly make a switch that easily outlasts the competition.


FLEXIBILITY

We offer media connections in NPT, BSP, SAE, JIS, DIN, MS, and many more (refer to page 23) as well as all the electrical connections depicted on the facing page.

DIAPHRAGM TYPE

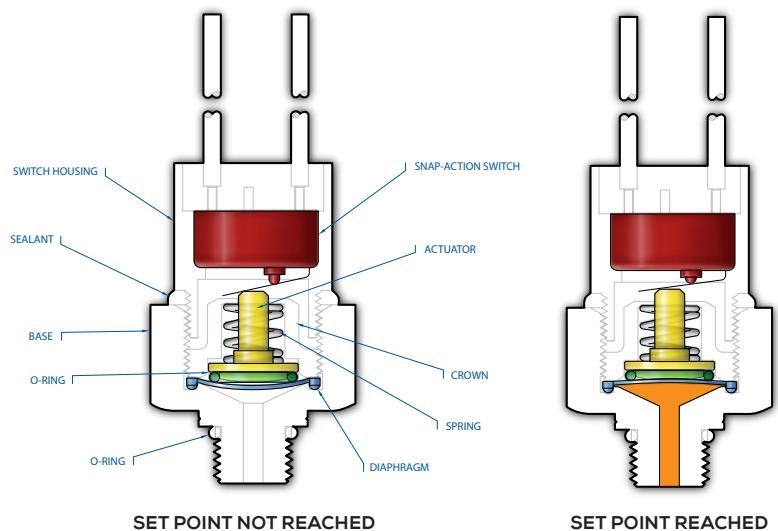

PISTON TYPE

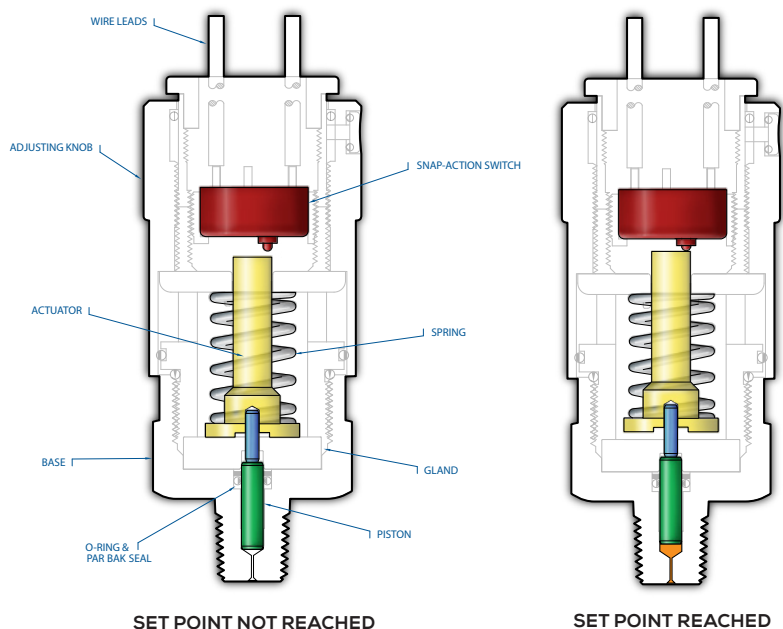

ELECTRICAL CONNECTION OPTIONS

MORE THAN THE COMPETITION

Nason knows that your designs are used in all types of applications imaginable, so we want to make sure you have a choice of how you configure electrical connections. We offer you a wide and growing selection of connections, and if you want something else, just ask our design engineers for it.



Screw
Terminals
#8 - 32

HF	HH	HR	HP	HM	MP	NP	
DIN43650A 1/2" Conduit (Plug & Receptacle) IP65	DIN43650A (Plug Only)	DIN43650A Strain Relief (Plug & Receptacle) IP67	9.4mm DIN (Plug Only)	9.4mm DIN (Plug & Receptacle) IP65	Metri-Pack Female 280 Series Sealed IP66	Metri-Pack Male 280 Series Sealed IP66	
CP	DP	PP	QC	WL	WP	TP	
Metri-Pack Female 150 Series Sealed IP66	Metri-Pack Male 150 Series Sealed IP66	Boot (Military Connector)	1/4" Male Spade Quick Connect	Wire Leads	Weather Pack (Female) IP66	Weather Pack (Male) IP66	
EL	EF	WD	PD	ES	CL	SL	VL
1/2" NPT Male Conduit	1/2" NPT Female Conduit	Deutsch Receptacle IP67	Deutsch Plug IP67	M12 - 4PIN IP67	Sheathed 18 AWG Primaries	SJO Cable	Convolute Covering

Color Code:
Pin Assignments:
DIN Connector Pin Assignments:
M12 Connector Pin Assignments:


Black - Common
A - Normally Open
#1 - Common
#1 - Common

Red - Normally Open
B - Common
#2 - Normally Closed
#2 - Not Used



Blue - Normally Closed
C - Normally Closed
#3 - Normally Open
#3 - Normally Open

#4 - Not Used
#4 - Normally Closed

PRESSURE SWITCHES

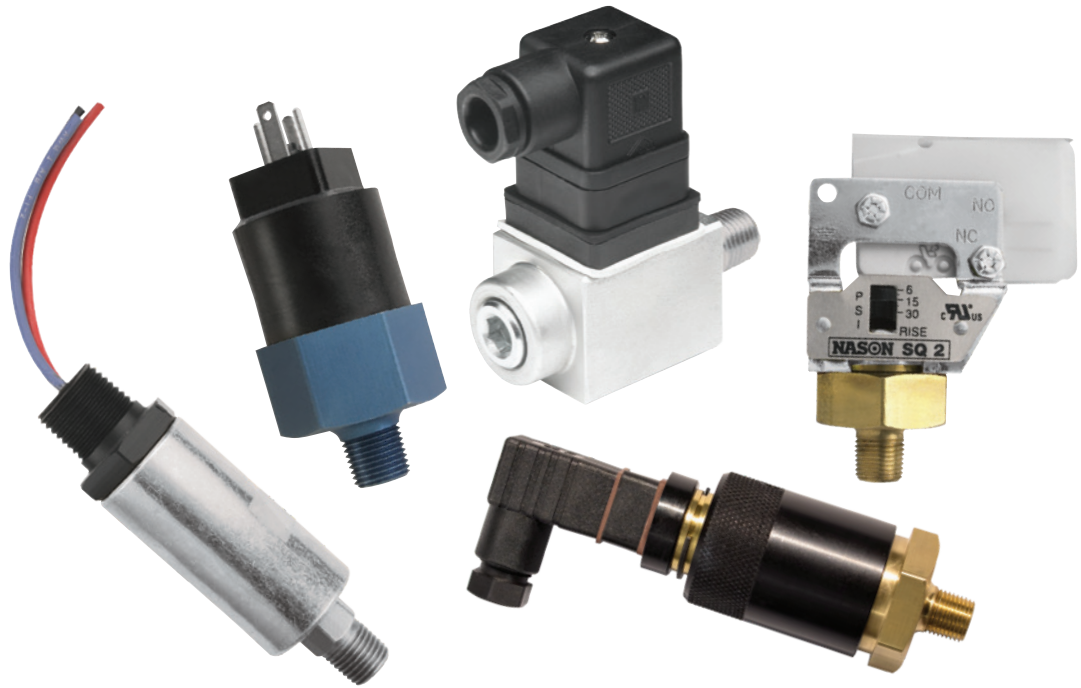

- Low to high pressure switch models with 2 psi to 7500 psi set points
- High-quality snap-action design
- Long-life elastomer diaphragms
- Proven sealed piston sensor on high-pressure models
- Over one million operating cycles
- 100% tested for accuracy
- Models for both pneumatic and hydraulic applications
- Adjustable and factory preset models
- Customizable
- NEMA 4 and 13 available

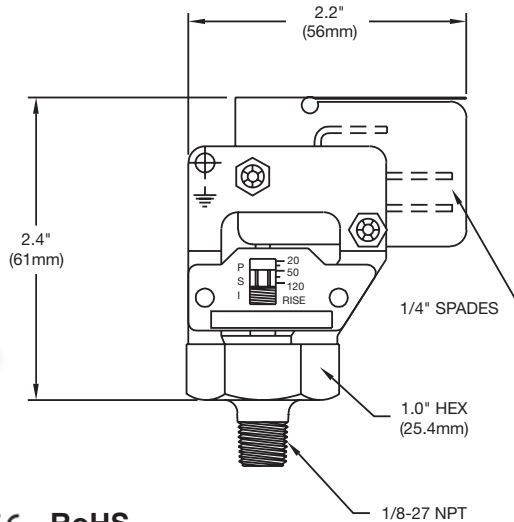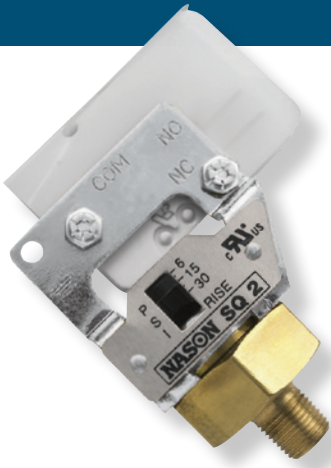

UL **CE** **RoHS**

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Fingertip adjustment
- Visual calibration
- Economical
- Quick delivery

Operating Specifications

Set Point Range	2 — 120 PSI	(.14 — 8.3 Bar)
Set Point Tolerance	±1 PSI or 5%	(.07 Bar)
Maximum Operating Pressure	250 PSI	(17 Bar)
Proof Pressure	750 PSI	(51 Bar)
Differential	10 — 20%	
Current Rating	10 A @ 125/250 VAC	5 A @ 30 VDC
Media Connection	1/8" NPT Male Brass	
Circuit Form	SPDT	
Electrical Connection	1/4" Blades	
Diaphragm Material	Buna N	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.2 lbs	

In-Stock Low Pressure Switches



Model SQ-1
Adjustment Range 2 — 10 PSI




Model SQ-2
Adjustment Range 6 — 30 PSI



Model SQ-3
Adjustment Range 20 — 120 PSI



Shown with HP electrical option

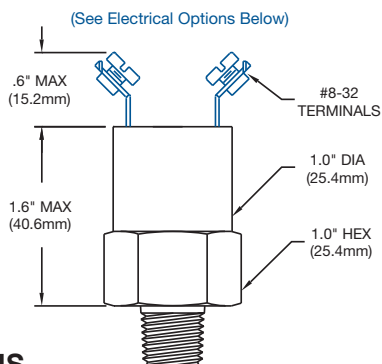

UL **CE** **RoHS**

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- Pneumatic and hydraulic applications
- NEMA 4, 13

Operating Specifications

Set Point Range	2 — 120 PSI	(.14 — 8.3 Bar)
Set Point Tolerance	±1 PSI or 5%	(.07 Bar)
Maximum Operating Pressure	250 PSI	(17 Bar)
Proof Pressure	750 PSI	(51 Bar)
Differential	8 — 16%	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
Media Connection	Standard: Brass (Optional: Aluminum, Nickel Plating, Delrin, Zinc Plated Steel, 303 SS, 316 SS)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna N	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.13 lbs	

CHECK OUT
nasonptc.com/configure
to create your own custom CAD file


How to Order (Example: Part Number: **SM - 2A - 95R /**)

SM - 2 A - 9 5 R / *				
Media Connection	Circuit Form	Fixed Set Point	Set Point Direction	Electrical Options
1 1/4" NPT Male	A SPST-NO	2 — 120 PSI	R Rising	WL Wire Leads 18"
2 1/8" NPT Male	B SPST-NC		F Falling	QC 1/4" Spade Connection
6 7/16" SAE O-Ring (-4)	C SPDT			WP Weather Pack
14 1/2" NPT Male				HR DIN43650A Connector
1/8" NPT Female				MP Metri-Pack
17 1/4" BSPP Male (G1/4)				AT 10 A @ 125/250 VAC
28 1/8" BSPP Male (G1/8)				5 A @ 30 VDC
41 7/16" — 20 Internal 45° Flare — SAE J 513				GG Internal Ground
77 M16 x 1.5 SAE J2244-3				AU Gold Plate/Alloy for low currents
* Defaults to Screw Terminals				

For more **media connections**, see pages 23-24.

For all available **optional configurations**, see page 22.

For more **electrical connections**, see page 7.

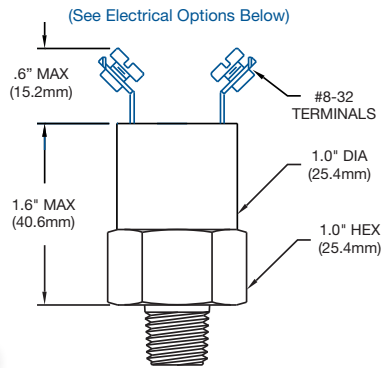

UL US CE RoHS

Shown with WP electrical option

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- Pneumatic and hydraulic applications
- NEMA 4, 13

Operating Specifications

Set Point Range	2 — 120 PSI	(.14 — 8.3 Bar)
Set Point Tolerance	±1 PSI or 5%	(.07 Bar)
Maximum Operating Pressure	600 PSI	(41 Bar)
Proof Pressure	1800 PSI	(124 Bar)
Differential	8 — 16%	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
Media Connection	Standard: Brass (Optional: Aluminum, Nickel Plating, Delrin, Zinc Plated Steel, 303 SS, 316 SS)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna N	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.16 lbs	

CHECK OUT

nasonptc.com/configure
to create your own custom CAD file

How to Order (Example: Part Number: **MM - 6A - 80R / WL**)


Media Connection		Circuit Form		Fixed Set Point		Set Point Direction		Electrical Options	
1	1/4" NPT Male	A	SPST-NO	2 — 120	PSI	R	Rising	WL	Wire Leads 18"
2	1/8" NPT Male	B	SPST-NC			F	Falling	WP	Weather Pack
6	7/16" SAE O-Ring (-4)	C	SPDT					HR	DIN43650A Connector
14	1/2" NPT Male							MP	Metri-Pack
	1/8" NPT Female							AT	10 A @ 125/250 VAC 5 A @ 30 VDC
17	1/4" BSPP Male (G1/4)							AU	Gold Plate/Alloy for low currents
28	1/8" BSPP Male (G1/8)								
41	7/16" — 20 Internal 45° Flare — SAE J 513								

* Defaults to Screw Terminals

For more [media connections](#),
see pages 23-24.

For all available [optional configurations](#),
see page 22.

For more [electrical connections](#),
see page 7.

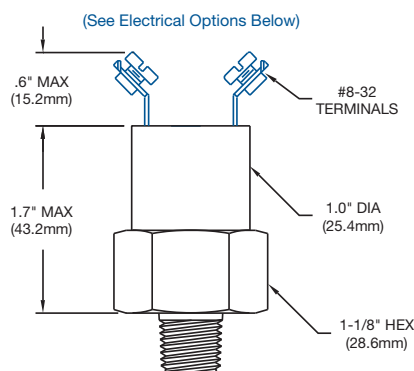

Shown with unibody housing and EF electrical option

UL **CE** **RoHS**

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- Pneumatic and hydraulic applications
- NEMA 4, 13

Operating Specifications

Set Point Range	10 — 300 PSI	(.69 — 20 Bar)
Set Point Tolerance	±1 PSI or 5%	(.07 Bar)
Maximum Operating Pressure	2000 PSI	(137 Bar)
Proof Pressure	6000 PSI	(413 Bar)
Differential	12 — 24%	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
Media Connection	Standard: Brass (<i>Optional: Nickel Plating, Delrin, Zinc Plated Steel, 303 SS, 316 SS</i>)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna N	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.23 lbs	

CHECK OUT
nasonptc.com/configure
to create your own custom CAD file

How to Order (Example: Part Number: **LM - 6A - 250R / WL**)


Media Connection		Circuit Form		Fixed Set Point		Set Point Direction		Electrical Options	
1	1/4" NPT Male	A	SPST-NO	10 — 300	PSI	R	Rising	WL	Wire Leads 18"
2	1/8" NPT Male	B	SPST-NC			F	Falling	WP	Weather Pack
6	7/16" SAE O-Ring (-4)	C	SPDT					HR	DIN43650A Connector
12	M10 x 1 SAE J2244-3							MP	Metri-Pack
49	M14 x 1.5 J2244/3							AT	10 A @ 125/250 VAC 5 A @ 30 VDC
68	9/16" — 18 SAE O-Ring Face Seal (Female)							AU	Gold Plate/Alloy for low currents

* Defaults to Screw Terminals

For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.

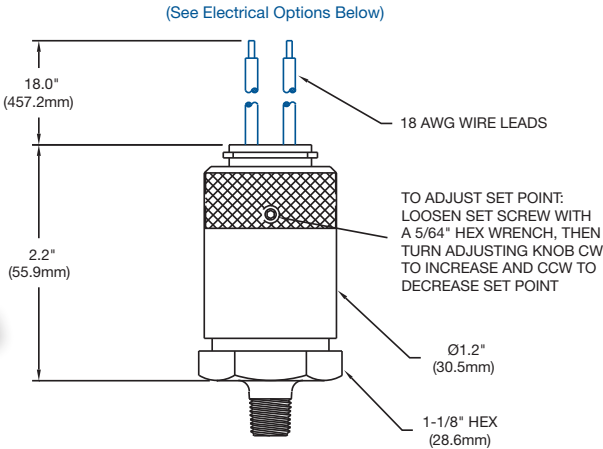

Shown with HM electrical option

UL **CE** **RoHS**

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Field adjustable
- Compact design
- Easily customized
- Quick delivery
- NEMA 4, 13

Operating Specifications

Set Point Range	3 — 120 PSI	(.21 — 8.3 Bar)
Set Point Tolerance	±1 PSI or 5%	(.07 Bar)
Maximum Operating Pressure	250 PSI (Ranges 1 — 3)	(17 Bar)
Proof Pressure	750 PSI (Ranges 1 — 3)	(51 Bar)
Differential	10 — 20%	
Current Rating	3 A @ 125 VAC	2 A @ 30 VDC (Resistive)
Media Connection	Standard: Brass (Optional: Aluminum, Nickel Plating, Delrin, 303 SS, 316 SS)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna N	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.42 lbs	

CHECK OUT
nasonptc.com/configure
to create your own custom CAD file

How to Order (Example: Part Number: **CJ - 1B3 - 60J / WL**)


Media Connection		Circuit Form		Range		Desired Set Point		Set Point Direction		Electrical Options	
1	1/4" NPT Male	A	SPST-NO	1	3 — 10 PSI	3 — 120 PSI		J	Rising Adjustable	WL	Wire Leads 18"
2	1/8" NPT Male	B	SPST-NC	2	6 — 30 PSI					WP	Weather Pack
6	7/16" SAE O-Ring (-4)	C	SPDT	3	20 — 120 PSI	*121 — 1500 PSI		G	Falling Adjustable	HM	9.4mm DIN
12	M10 x 1 SAE J2244-3			4*	100 — 400 PSI					MP	Metri-Pack
17	1/4" BSPP Male			5*	500 — 1500 PSI					AU	Gold Plate/Alloy for low currents
28	1/8" BSPP Male										

* Not yet UL recognized

For more **media connections**, see pages 23-24.

For all available **optional configurations**, see page 22.

For more **electrical connections**, see page 7.

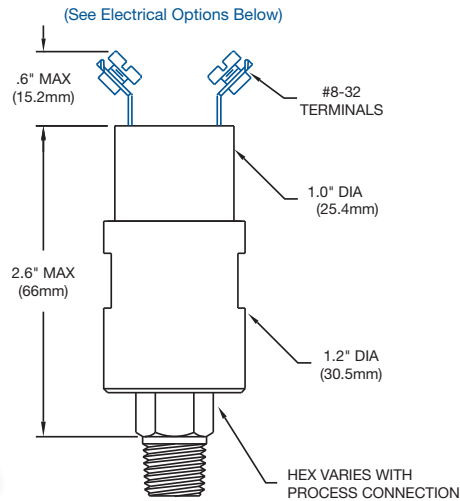

Shown with unibody housing and EL electrical option

UL **CE** **RoHS**

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Compact design
- Available in a wide range of configurations
- Proven in the most demanding mobile hydraulic applications
- NEMA 4, 13

Operating Specifications

Set Point Range	40 — 4000 PSI	(1.3 — 275 Bar)
Set Point Tolerance	±5 PSI or 5%	(.34 Bar)
Maximum Operating Pressure	5000 PSI	(344 Bar)
Proof Pressure	15000 PSI	(1034 Bar)
Differential	8 — 16%	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
Media Connection	Standard: Zinc Plated Steel (<i>Optional: Brass, Nickel Plating, 303 SS, 316 SS</i>)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna N	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.56 lbs	

CHECK OUT
nasonptc.com/configure
to create your own custom CAD file

How to Order (Example: Part Number: **XM - 1A - 1500R / WL**)


Media Connection		Circuit Form		Fixed Set Point		Set Point Direction		Electrical Options	
1	1/4" NPT Male	A	SPST-NO	40 — 4000	PSI	R	Rising	WL	Wire Leads 18"
2	1/8" NPT Male	B	SPST-NC			F	Falling	WP	Weather Pack
4	7/16" SAE 37° Flare (-4)	C	SPDT					HR	DIN43650A Connector
6	7/16" SAE O-Ring (-4)							MP	Metri-Pack
11	9/16" SAE O-Ring (-6)							AT	10 A @ 125/250 VAC 5 A @ 30 VDC
17	1/4" BSPP Male (G1/4)							AU	Gold Plate/Alloy for low currents
47	1/4" — 19BSPP Female (G1/4)								

* Defaults to Screw Terminals

For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.

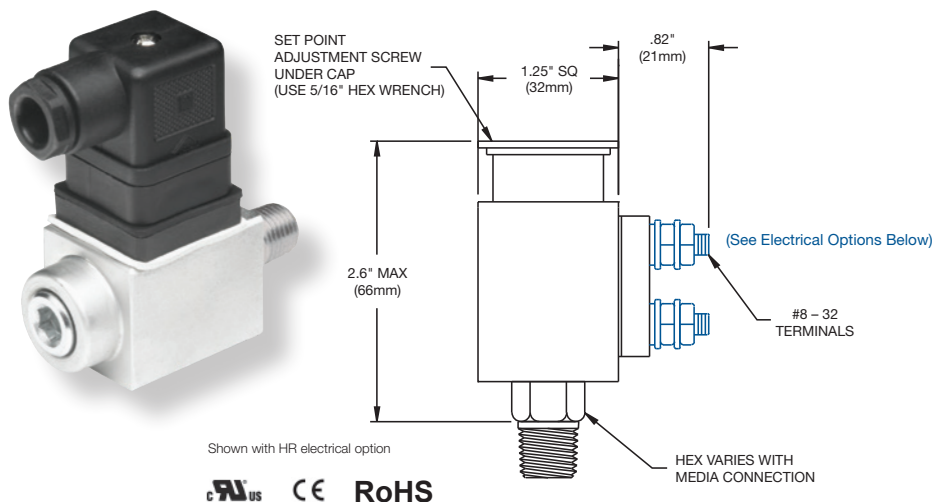

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Field adjustable
- Compact design
- Available in a wide range of configurations
- Proven in the most demanding mobile hydraulic applications
- NEMA 4, 13

Operating Specifications


Set Point Range	50 — 5000 PSI	(1.38 — 344 Bar)
Set Point Tolerance	±5 PSI or 5%	(.34 Bar)
Maximum Operating Pressure	5000 PSI	(344 Bar)
Proof Pressure	15000 PSI	(1034 Bar)
Differential	3 — 10%	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
Media Connection	Standard: Zinc Plated Steel (Optional: Brass, Nickel Plating, 303 SS, 316 SS)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna N	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.80 lbs	

CHECK OUT
nasonptc.com/configure
to create your own custom CAD file

How to Order (Example: Part Number: **WX - 2A - 100J / HR** *)

Media Connection		Circuit Form		Adjustment Range		Set Point Direction		Electrical Options	
1	1/4" NPT Male	A	SPST-NO	50 — 150 PSI	J	Rising Adjustable	WL	Wire Leads 18"	
2	1/8" NPT Male	B	SPST-NC	140 — 400 PSI	G	Falling Adjustable	QC	1/4" Spade Connection	
4	7/16" SAE 37° Flare (-4)	C	SPDT	300 — 800 PSI			WP	Weather Pack	
6	7/16" SAE O-Ring (-4)			700 — 2500 PSI			HR	DIN43650A Connector	
11	9/16" SAE O-Ring (-6)			2000 — 5000 PSI			MP	Metri-Pack	
17	1/4" BSPP Male (G1/4)						AT	10 A @ 125/250 VAC 5 A @ 30 VDC	
39	1/4" — 18 NPTF SAE J516 (-4)						GG	Internal Ground	
67	9/16" — 18 SAE O-Ring Face Seal						AU	Gold Plate/Alloy for low currents	

* Defaults to Screw Terminals

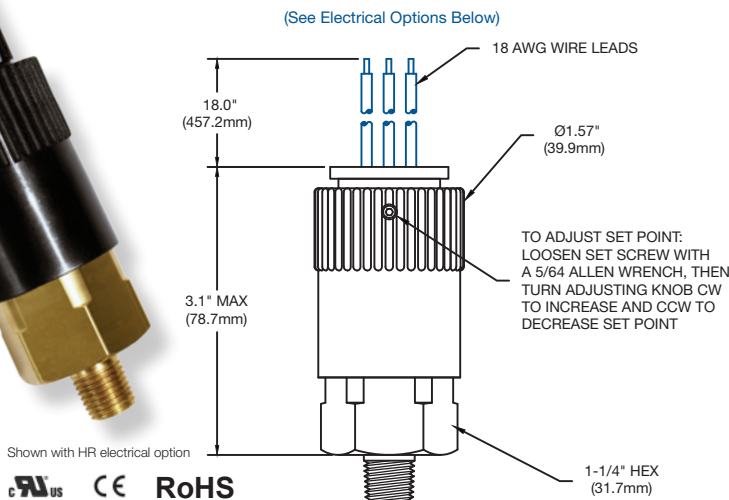

Features

- Long-life elastomer diaphragm (Ranges 1 – 3)
- Proven sealed piston sensor (Ranges 4 – 8)
- High-quality snap-action switch
- Field adjustable
- Easily customized
- Quick delivery
- NEMA 4, 13

Operating Specifications

Set Point Range	10 – 7500 PSI	(.69 – 517 Bar)
Set Point Tolerance	±5 PSI or 5%	(.34 Bar)
Maximum Operating Pressure	1000 PSI (Ranges 1 – 3)	(69 Bar)
	5000 PSI (Ranges 4 – 7)	(344 Bar)
	7500 PSI (Range 8)	(517 Bar)
Proof Pressure	3000 PSI (Ranges 1 – 3)	(206 Bar)
	15000 PSI (Ranges 4 – 7)	(1034 Bar)
	22500 PSI (Range 8)	(1551 Bar)
Differential	10 – 20%	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
Media Connection	Standard: Brass (Optional: Nickel Plating, 303 SS, 316 SS)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna (Ranges 1 – 3)	
	Hardened Steel Piston (Ranges 4 – 8)	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.47 lbs (noryl adjustment knob); .70 lbs (metal adjustment knob)	

CHECK OUT
nasonptc.com/configure
to create your own custom CAD file

How to Order (Example: Part Number: **CD - 1B5 - 750J / EL**)

Media Connection	Circuit Form	Range	Desired Set Point	Set Point Direction
Piston	A SPST-NO	1 10 – 40 PSI	10 – 7500 PSI	J Rising Adjustable
1 1/4" NPT Male	B SPST-NC	2 25 – 100 PSI		G Falling Adjustable
3 3/4" SAE Male (-8)	C SPDT	3 50 – 200 PSI		
11 9/16" SAE Male		4 100 – 400 PSI		
Diaphragms		5 250 – 1000 PSI		
1 1/4" NPT Male		6 500 – 2000 PSI		
9 3/8" NPT Male		7 1200 – 4500 PSI		
		8 2400 – 7500 PSI		


Electrical Options

- WL** Wire Leads 18"
- EL** Male Conduit 1/2" – 14
- EF** Female Conduit 1/2" – 14
- HR** DIN43650A Connector
- HH** DIN43650A Plug Only
- WP** Weather Pack
- MP** Metri-Pack
- WD** Deutsch
- AT** 10 A @ 125/250 VAC
5 A @ 30 VDC
- AU** Gold Plate/Alloy for low currents

For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.

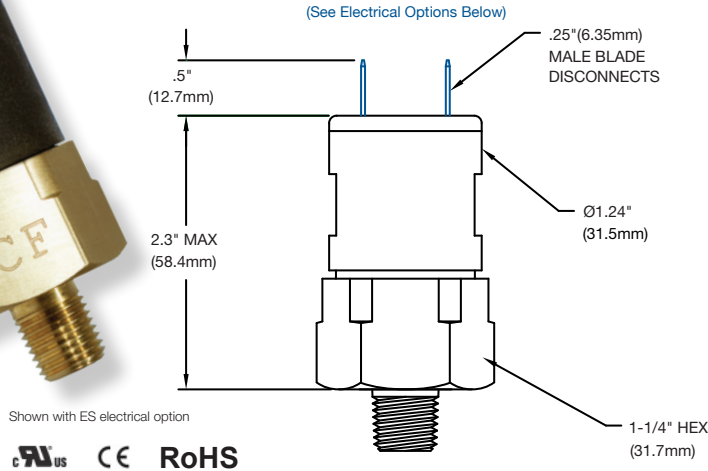

Features

- Long-life elastomer diaphragm (Set Points: 10 — 300 PSI)
- Proven sealed piston sensor (Set Points: 100 — 4500 PSI)
- High-quality snap-action switch
- Easily customized
- Quick delivery
- NEMA 4, 13

Operating Specifications

Set Point Range	10 — 4500 PSI	(.69 — 310 Bar)
Set Point Tolerance	±5 PSI or 5%	(.34 Bar)
Maximum Operating Pressure	1000 PSI (Diaphragm Model)	(69 Bar)
	5000 PSI (Piston Model)	(344 Bar)
Proof Pressure	3000 PSI (Diaphragm Model)	(206 Bar)
	15000 PSI (Piston Model)	(1034 Bar)
Differential	10 — 20%	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
Media Connection	Standard: Brass (<i>Optional: Nickel Plating, 303 SS, 316 SS</i>)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna (Diaphragm Design)	
	Hardened Steel Piston (Piston Design)	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.33 lbs (noryl switch housing); .38 lbs (metal switch housing)	

CHECK OUT
nasonptc.com/configure
to create your own custom CAD file

How to Order (Example: Part Number: **CF - 1B - 750R / EL**)

CF	-	1	B	-	7	5	0	R	/

Electrical Options

- WL** Wire Leads 18"
- EL** Male Conduit 1/2" — 14
- EF** Female Conduit 1/2" — 14
- HR** DIN43650A Connector
- HH** DIN43650A Plug Only
- WP** Weather Pack
- MP** Metri-Pack
- WD** Deutsch
- AT** 10 A @ 125/250 VAC
5 A @ 30 VDC
- AU** Gold Plate/Alloy for low currents

For more [media connections](#), see pages 23-24.


For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.

VACUUM SWITCHES



- 1" to 29" vacuum models available
- Long-life elastomer diaphragms
- High-quality snap-action design
- Factory preset or field adjustable
- Over one million operating cycles
- 100% tested for accuracy
- NEMA 4 and 13 available

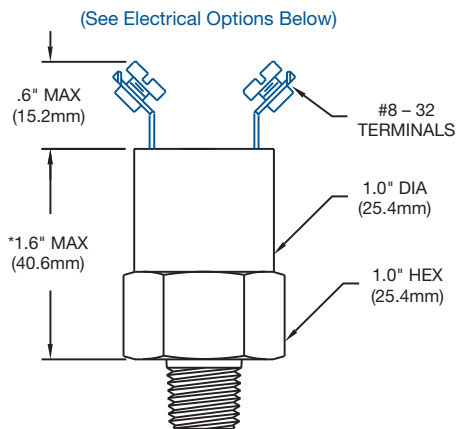

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

Operating Specifications

Set Point Range	4" — 29" Hg	(102mm — 736mm Hg)
Set Point Tolerance	±2" Hg	(50mm Hg)
Maximum Operating Pressure	250 PSI	(17 Bar)
Differential	20 — 40%	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
Media Connection	Standard: Brass (Optional: Aluminum, Nickel Plating, Delrin, 303 SS, 316 SS)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna N	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.16 lbs	

CHECK OUT
nasonptc.com/configure
to create your own custom CAD file

How to Order (Example: Part Number: **VM - 11A - 10R / WP** *)


VM - 11 A - 1 0 R / WP *						
Media Connection		Circuit Form	Fixed Set Point	Set Point Direction	Electrical Options	
1	1/4" NPT Male	A	SPST-NO	4" — 29" Hg	WL	Wire Leads 18"
2	1/8" NPT Male	B	SPST-NC		R	WP
11	9/16" SAE O-Ring (-6)	C	SPDT	F	HR	DIN43650A Connector
17	1/4" BSPP Male (G1/4)				MP	Metri-Pack
					AT	10 A @ 125/250 VAC 5 A @ 30 VDC
					AU	Gold Plate/Alloy for low currents

* Defaults to Screw Terminals

For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.

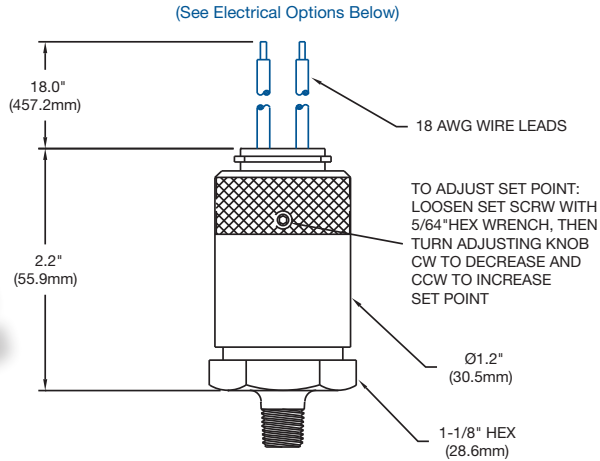

Shown with HM electrical option

RoHS

Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Field adjustable
- Compact design
- Easily customized
- Quick delivery
- NEMA 4, 13

Operating Specifications

Set Point Range	2 — 28 Hg	(.07 - .95 Bar)
Set Point Tolerance	± 2" Hg	(.07 Bar)
Maximum Operating Pressure	250 PSI (Ranges 1 — 3)	(17 Bar)
Proof Pressure	750 PSI (Ranges 1 — 3)	(51 Bar)
Differential	20 — 40%	
Current Rating	3 A @ 125 VAC	2 A @ 30 VDC (Resistive)
Media Connection	Standard: Brass (<i>Optional: Aluminum, Nickel Plating, Delrin, 303 SS, 316 SS, CF</i>)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna N	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.42 lbs	

CHECK OUT
nasonptc.com/configure
to create your own custom CAD file

How to Order (Example: Part Number: **JV - 1B2 - 15J / WL**)

Media Connection		Circuit Form		Range		Desired Set Point		Set Point Direction		Electrical Options	
1	1/4" NPT Male	A	SPST-NO	1	2-10 Hg	2 — 28" Hg		J	Rising Adjustable	WL	Wire Leads 18"
2	1/8" NPT Male	B	SPST-NC	2	5-28 Hg			G	Falling Adjustable	WP	Weather Pack
6	7/16" SAE O-Ring (-4)	C	SPDT	* Not yet UL recognized						HM	9.4mm DIN
11	9/16 - 18 O-Ring -6 (SAE)									MP	Metri-Pack
17	1/4" BSPP Male									AU	Gold Plate/Alloy for low currents
28	1/8" BSPP Male										


For more [media connections](#), see pages 23-24.

For all available [optional configurations](#), see page 22.

For more [electrical connections](#), see page 7.



Shown with HR electrical option

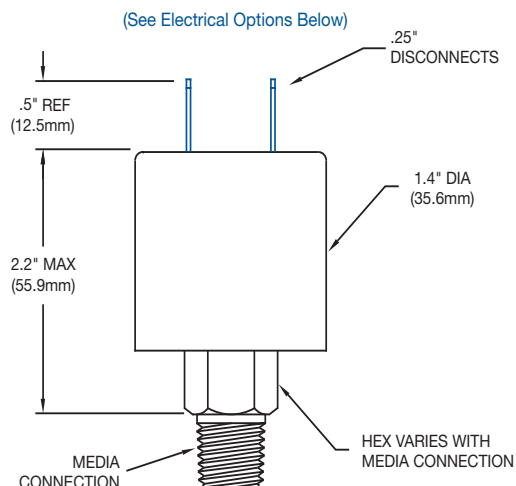RoHS**Features**

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

Operating Specifications

Set Point Range	1.5" — 28" Hg	(.05 - .95 Bar)
Set Point Tolerance	±2" Hg	(.07 Bar)
Maximum Operating Pressure	250 PSI	(17 Bar)
Differential	20 — 40%	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
Media Connection	Standard: Brass (<i>Optional: Aluminum, Nickel Plating, Delrin, 303 SS, 316 SS</i>)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Diaphragm Material	Buna N	
Cycle Life	1 Million	
Operating Temperature	-20°F - +220°F	
Unit Weight	.48 lbs	

CHECK OUT
nasonptc.com/configure
 to create your own custom CAD file

How to Order (Example: Part Number: **VF- 1A - 20R / QC**)

VF - 1 A - 2 0 R / QC *				
Media Connection	Circuit Form	Adjustment Range	Set Point Direction	Electrical Options
1 1/4" NPT Male	A SPST-NO	1.5" — 29" Hg	R Rising	WL Wire Leads 18"
2 1/8" - 27 NPT Male	B SPST-NC		F Falling	WP Weather Pack
8 1/8" -27 NPT Female	C SPDT			HR DIN43650A Connector
11 9/16" -18 SAE-6	J 514			MP Metri-Pack
17 1/4" BSPP Male (G1/4)				AT 10 A @ 125/250 VAC 5 A @ 30 VDC
				AU Gold Plate/Alloy for low currents
				QC 1/4" Male Spade Quick Connect

* Defaults to Screw Terminals

For more [media connections](#), see pages 23-24.For all available [optional configurations](#), see page 22.For more [electrical connections](#), see page 7.

Pressure / Vacuum Switch Part Number Configuration


(Complete open boxes only. Shaded boxes should have been previously completed on individual switch pages.)

CHECK OUT
nasonptc.com/configure
 to create your own custom CAD file

Wire Length Settings

- 1 3" Wire Length
- 2 6" Wire Length
- 3 12" Wire Length
- 4 18" Wire Length
- 5 24" Wire Length
- 6 36" Wire Length
- 7 48" Wire Length
- 8 60" Wire Length
- 9 Special Wire Length

Variant #*

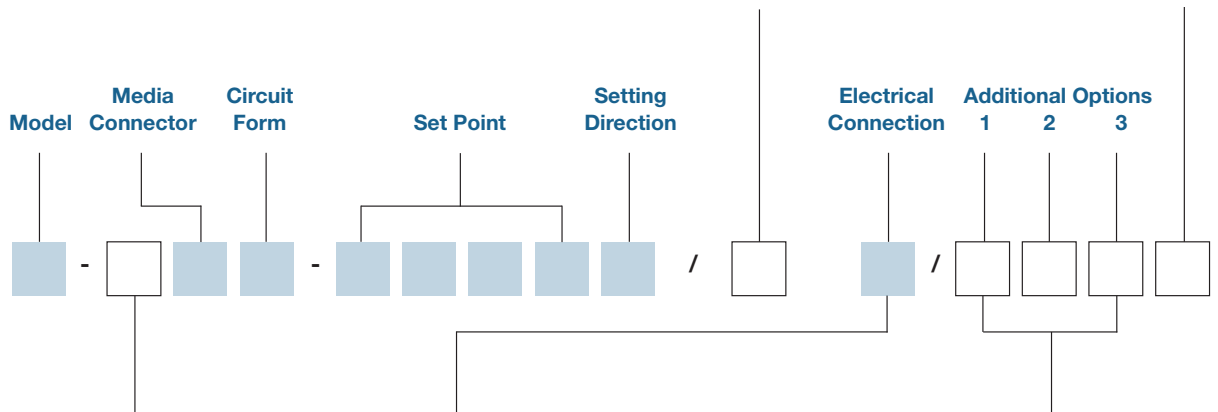

Media Connection Modifier

- A** Aluminum
- B** Brass
- N** Nickel Plating
- P** Delrin
- S** Zinc Plated Steel
- T** 303 Stainless Steel
- U** 316 Stainless Steel

Electrical Connection

- HF** DIN43650A 1/2" Conduit (Plug & Receptacle)
- HH** DIN43650A (Plug Only)
- HR** DIN43650A Strain Relief (Plug & Receptacle)
- HP** 9.4mm DIN (Plug Only)
- HM** 9.4mm DIN (Plug & Receptacle)
- MP** Metri-Pack Female 280 Series Sealed (Nason Standard)
- NP** Metri-Pack Male 280 Series Sealed
- CP** Metri-Pack Female 150 Series Sealed
- DP** Metri-Pack Male 150 Series Sealed
- PP** Boot (Military Connector)
- QC** 1/4" Male Spade Quick Connect
- WL** Wire Leads
- WP** Weather Pack (Female)
- TP** Weather Pack (Male)
- EL** 1/2" NPT Male Conduit
- EF** 1/2" NPT Female Conduit
- WD** Deutsch Receptacle (DT04)
- PD** Deutsch Plug (DT06)
- HL** Lighted DIN (Plug & Receptacle)
- PT** 10 — 32 Post
- ES** M12 - 4PIN
- CL** Sheathed 18 AWG
- SL** SJO Cable

Additional Options

- 1. Diaphragms**
 - BL** Buna 50 Durometer
 - BT** Buna 431T
 - EP** EP 559 PE
 - FS** Fluorosilicone
 - GJ** Viton 514 GJ
 - HJ** HNBR, 574 HJ
 - NE** Neoprene
 - SI** 71418 Silicone 80 DUR
 - VT** Viton 514 AD
 - YP** Viton 514 YP
- 2. Contacts****
 - AT** 10 A @ 125/250 VAC
5 A @ 30 VDC
 - AU** Gold Plate/Alloy for low currents
 - AH** 25 A @ 277 VAC
5 A @ 30 VDC
- 3. Other**
 - VL** Convolute (for wire leads)
 - GG** Internal Ground
 - NF** NSF Approved

* Variant # identifies this configuration as unique to a specific customer or application.

** Ask about our new environmentally sealed snap-action switch.

Pressure / Vacuum Switches

Option	Base Thread Size*	SM	MM	LM	CJ	XM	WX	CD	VM	NV	VP
1	1/4 — 18 NPT Male	•	•	•	•	•	•	•	•	•	•
2	1/8 — 27 NPT Male	•	•	•	•	•	•	•	•	•	
3	3/4 — 16 UNF SAE O-Ring (-8)	•	•		•	•	•	•	•	•	
4	7/16 — 20 37° JIC Flare (-4)			•		•	•				
5	1/4 — 18 NPT Female	•	•			•	•	•			
6	7/16 — 20 O-Ring J514 (-4)	•	•	•	•	•	•	•		•	•
7	1/4 — 18 NPT Female (Obsolete) See Option 5										
8	1/8 — 27 NPT Female	•	•			•	•		•	•	•
9	3/8 — 18 NPT Male	•	•	•	•	•	•	•	•		
10	1/4 Female Stainless Steel (Obsolete) See Option 5										
11	9/16 — 18 SAE J514 O-Ring (-6)	•	•	•	•	•	•	•	•		•
12	M10 x 1 SAE J2244-3 O-Ring	•	•	•	•	•	•				
13	1/2 — 20 UNF SAE O-Ring (-5)	•	•			•	•	•	•		•
14	1/2 NPT Male 1/8 NPT Female	•	•							•	
15	7/16 — 20 Female SAE O-Ring (-4)					•	•	•			
16	7/16 — 20 Female SAE J 514 37 DEG			•		•	•				
17	1/4 BSPP Male (G1/4)	•	•	•	•	•	•	•	•	•	•
18	7/16 — 20 SAE J1926 O-Ring (Adjustable)					•	•				
19	1/8 BSPT JIS (R1/8)	•	•	•		•	•				
20	Tri-Clover					•	•				
21	1/4 BSPP Extended (G1/4)	•	•			•	•		•		
22	1/2 — 14 NPT Brass Male (IS Only)										
23	1/4 — 18 NPT SS Female (IS Only)										
24	10/32 INT 3/8 — 24 EXT	•	•								
25	1/4 NPT Plastic (Obsolete) See Option 1										
26	9/16 — 18 Female 37 DEG SAE J 514 (-6)			•		•	•	•			
27	1/2 BSPT — Male (R1/2)	•	•						•		
28	1/8 BSPP (G1/8)	•	•		•						
29	3/8 — 24 SAE O-Ring J514 (-3)	•	•			•	•				
30	1/4 BSPT (JIS) (R1/4)	•	•					•	•		
31	Flange (NS Only)										
32	M12 — 1.5 Metric	•	•								
33	NO LONGER AVAILABLE										
34	7/16 — 20 MS33649 Female*					•	•				
35	1/2 — 14 NPT (Male)	•	•	•		•	•				
36	9/16 — O-Ring Ext Boss (-6)			•		•	•				
37	3/8 — 24 2A Inverted Flare	•	•	•							
38	9/16 — 12 UNC (SR Only)	•	•					•		•	
39	1/4 — 18 NPTF SAE J516 (-4)					•	•	•			
40	M10X1 SAE J2244-3 (Obsolete) See Option 12										
41	7/16 — 20 Internal 45° Flare — SAE J 513	•	•						•		
42	9/16 — 18 SAE J1926 O-Ring (Adjustable)										
43	M10 x 1 SAE J2244-3 Extended	•	•								
44	1/4 — 18 NPT Female Extended					•	•				
45	9/16 — 18 Female SAE J514 O-Ring (-6)					•	•				
46	1/8 NPT Male Clipped Hex	•	•								
47	1/4 — 19 BSPP Female (G1/4)					•	•				

*Call Nason at **800.229.4955** if you don't see the media connection that fits your application. **Note:** Consult factory for materials and stock.

Pressure / Vacuum Switches

Option	Base Thread Size*	SM	MM	LM	CJ	XM	WX	CD	VM	NV	VP
48	9/16 — 18 SAE J514 O-Ring (-6)										•
49	M14 x 1.5 J2244/3 O-Ring	•	•	•		•	•	•			
50	.302 — 32 Female	•	•								
51	M14 x 1.5 (19mm Hex)			•							
52	3/8 — 24 UNF W/ 1/4 BARB	•	•								
53	M12 x 1.5 SAE J2244/3 O-Ring	•	•	•		•	•	•			
54	1-1/8 Hex 1/4 NPT					•	•				
55	1/2 BSPP (G1/2)					•	•				
56	M10 x 1 Metric Pipe Thread	•	•			•	•				
57	7/16 — 20 1-1/8 Hex					•	•				
58	9/16 — 18 1-1/8 Hex					•	•				
59	1-11 — 1/2 NPT										
60	1/4 SAE J513 Female Flare Deflator	•	•			•	•		•		
61	9/16 — 18 SAE J514 37° Male					•	•	•			
62	NO LONGER AVAILABLE										
63	1/2 — 20 Extended	•	•								
64	3/8 — 19 BSPP (G3/8)	•	•								
65	3/4 — 14 NPT Male			•							
66	1/4 Tube Plastic	•									
67	9/16 — 18 SAE J1453 O-Ring Face Seal (-4)			•		•	•	•			
68	9/16 — 18 SAE O-Ring Face Seal (Female)			•		•					
69	11/16 — 16 SAE J1453 O-Ring Face Seal (-6)					•	•	•			
70	M10 x 1.25 Female Flare Deflator	•	•								
71	DX Face Seal Mount										
72	11/16 — 16 SAE O-Ring Face Seal (Female)			•							
73	M18 x 1.5 SAE J2244/3 O-Ring							•			
74	Special SM/MM Port Seal	•	•								
75	1/8 — 27 Straight with 1/8 Barb									•	
76	M8 x 1 SAE J2244-2 O-Ring	•	•								
77	M16 x 1.5 SAE J2244-3 O-Ring	•	•								
78	M16 x 1.0							•			
79	M14 x 1.5 For Washer Seal										
80	3/8 O-Ring Port Seal	•	•								
81	3/8 — 24 J512 (-3) 45° Flare					•					
82	5/16 — 24 For #13 O-Ring Seal	•	•								
83	M9 X 1.25 6G					•					
84	3/8 — 24 UNF 2A (-3) 37° Flare	•	•								
85	M10 X 1 DIN 3852 Type B			•							
86	3/4 — 14 Male 1/4 — 18 NPT Female										
87	Top Manifold Mount (Seal)	•	•								
88	M16 X 1.5 For Copper Washer Seal	•	•								
89	M16 O-Ring Port Seal	•	•								
90	Stoelting Flange	•									
91	1/2 NPT Male 1/4 NPT Female	•	•			•					
92	3/8 BSPT (R3/8)	•	•			•					
93	7/16 — 20 For Washer Seal			•							

*Call Nason at **800.229.4955** if you don't see the media connection that fits your application. **Note:** Consult factory for materials and stock.

Pressure / Vacuum Switches

So we can better meet your application needs, please take a moment to fill out this operation specifications form. Nason will provide a sample to your specifications.

1 Maximum Operating Pressure: _____

2 Media: _____

3 Set Point: Rising _____ Falling _____

 Rising Adjustable _____ Falling Adjustable _____

4 Circuit Form: ☐ SPST-NO ☐ SPST-NC ☐ SPDT

5 Differential: _____

6 Circuit: Electrical ☐ AC _____ V ☐ DC _____ V

 Load (Amps) _____ ☐ Resistive ☐ Inductive Inrush _____

7 Media Connection: _____

8 Electrical Connection: _____

9 Temperature: Media _____ °F Ambient _____ °F

10 Cycles: _____ per hour Other (describe): _____

11 Other Special Requirements (attach separate sheet if necessary): _____

12 System: ☐ New Design ☐ Redesign

13 Application: What will switch control? (Attach circuit diagrams if available) _____

14 Prototype(s) Required by (Date): _____

15 Estimated Annual Usage: _____ Target Net Price: _____

Firm: _____


Address: _____

Project Number or Name: _____


Name & Title: _____ Phone: _____

Email Address: _____


TEMPERATURE SWITCHES

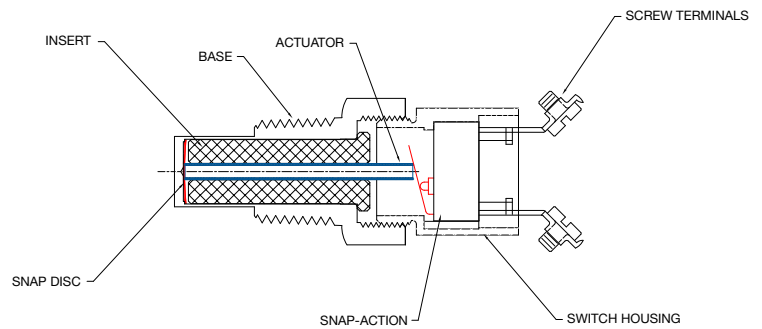

SNAP DISC THERMOSTAT DESIGN

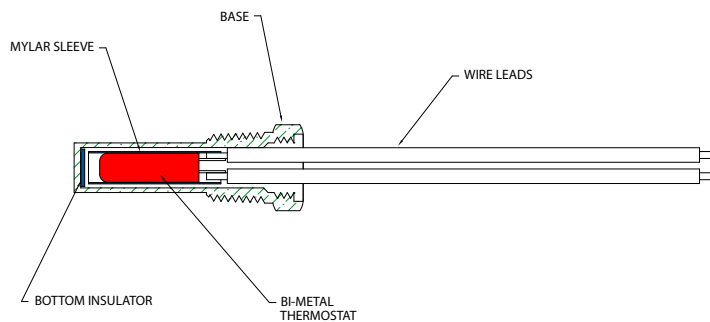


BI-METAL THERMOSTAT DESIGN

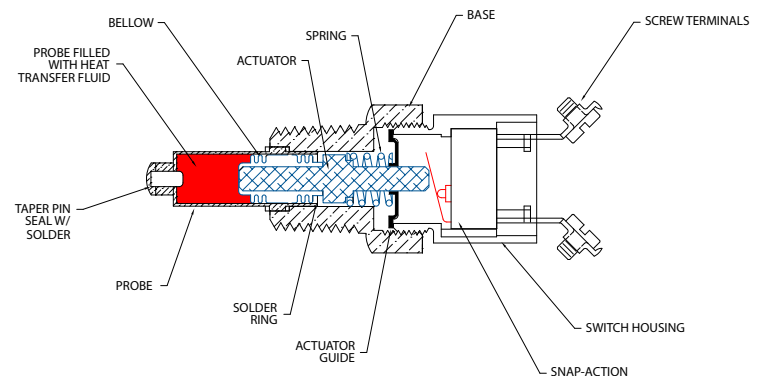


BELLOWS THERMOSTAT DESIGN

- Models TT, TD, TM, and HT
- TT – Bi-metal immersion temperature switch for low voltage/low current applications
- TD – Snap disc design for high reliability with shock and vibration
- TM and HT – Bellows design for high reliability with shock and vibration
- Available in a wide range of configurations
- NEMA 4 and 13 available
- 100% tested for accuracy

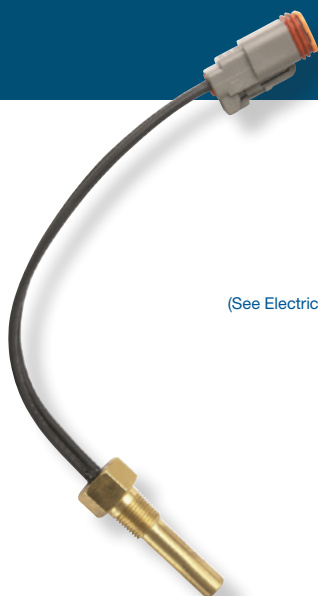

(See Electrical Options Below)

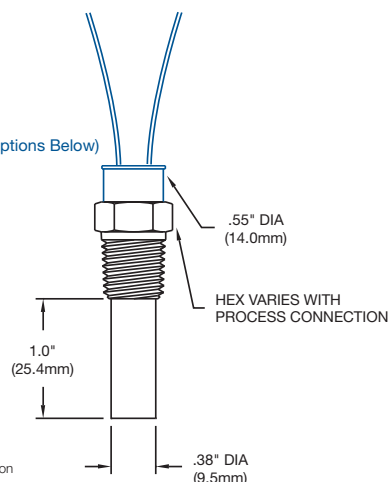

Shown with PD electrical option

UL **CE** **RoHS**

Features

- Bi-metal immersion temperature switch
- Factory preset temperature
- Direct action contacts/minimum hysteresis
- Gold diffused, fine silver contacts
- Available in a wide range of configurations
- Economical and compact
- NEMA 4, 13

Operating Specifications

Set Point Range	40° — 300°F	(4° — 149°C)
Set Point Tolerance	±5°F	(2.8°C)
Maximum Temperature	325°F	(163°C)
Current Rating	3 A @ 240 VAC	2 A @ 24 VDC (Resistive)
Probe Length	1"	
Media Connection	Standard: Brass (<i>Optional: 303 SS, 316 SS</i>)	
Circuit Form	SPST-NO or SPST-NC	
Electrical Connection	See Order Chart Below for Options	
Maximum External Pressure	5000 PSI	
Unit Weight	.09 lbs	
Installation Torque	15 ft lbs	
	Smaller than 3/8" NPT Male = 5 — 10 ft lbs	

CHECK OUT
nasonptc.com/configure
to create your own custom CAD file

How to Order (Example: Part Number: **TT - D3A - 100R / WL** *)



TT		-	D	3	A	-	1	0	0	R	/	WL	*
Probe Length		Media Connection		Circuit Form		Fixed Set Point		Set Point Direction		Electrical Options			
D	1/2"	1	1/2" NPT Male	A	SPST-NO	40°F — 300°F		(5° Increments)	R	Rising	WL	Wire Leads 6"	
E	3/4"	2	3/8" NPT Male	B	SPST-NC				F	Falling	QC	1/4" Spade Connection	
F	1"	3	1/4" NPT Male								WP	Weather Pack	
H	1-1/2"	5	3/4" SAE O-Ring (-8)								MP	Metri-Pack	
J	2"	6	M16 x 1.5								GG	Internal Ground	
		13	1/4" NPT (316SS)							* Defaults to Screw Terminals			
		35	M12 x 1.5										
		46	M14 x 1.25										

* Defaults to Screw Terminals

For more [media connections](#),
see pages 32-33.

For all available [optional configurations](#),
see page 34.

For more [electrical connections](#),
see page 7.

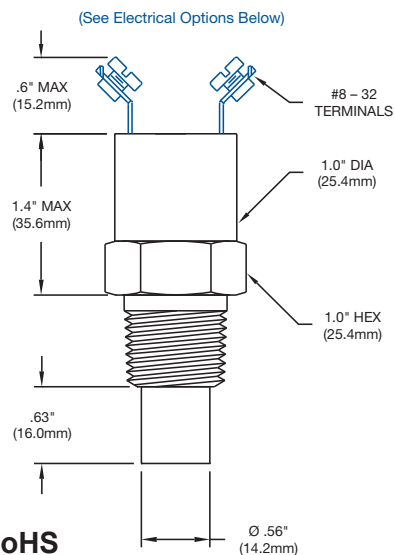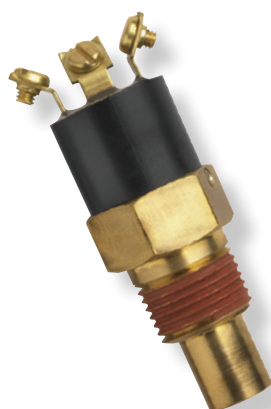

UL US CE RoHS

Features

- Utilizes snap disc approach to sense temperature
- High-quality snap-action switch
- Factory preset
- Shock and vibration resistant
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

Operating Specifications

Set Point Range	150° — 300°F	(65° — 149°C)
Set Point Tolerance	±5°F	(2.8°C)
Maximum Operating Temperature	325°F	(163°C)
Differential	8 — 16°F	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
Media Connection	Standard: Brass (<i>Optional: 303 SS, 316 SS</i>)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Maximum External Pressure	2500 PSI	
Unit Weight	.21 lbs	
Installation Torque	15 ft lbs	
	Smaller than 3/8" NPT Male = 5 — 10 ft lbs	

CHECK OUT
nasonptc.com/configure
 to create your own custom CAD file

How to Order (Example: Part Number: **TD - 1C - 175R / WP**)


Media Connection	Circuit Form	Fixed Set Point	Set Point Direction	Electrical Options
1 1/2" NPT Male 2 3/8" NPT Male 5 3/4" SAE O-Ring (-8) 17 M18 x 1.5 SAE J2244 23 1/2" BSPT (R1/2) 38 9/16" SAE-6 J514	A SPST-NO B SPST-NC C SPDT	150°F — 300°F (5° Increments)	R Rising	QC 1/4" Spade Connection WL Wire Leads 18" WP Weather Pack HR DIN43650A Connector MP Metri-Pack WD Deutsch AT 10 A @ 125/250 VAC 5 A @ 30 VDC AU Gold Plate/Alloy for low currents

* Defaults to Screw Terminals

For more [media connections](#), see pages 32-33.

For all available [optional configurations](#), see page 34.

For more [electrical connections](#), see page 7.

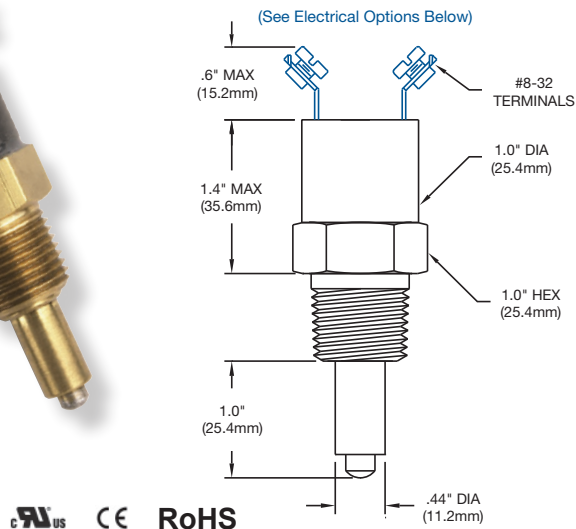

UL US CE RoHS

Features

- Utilizes bellows mechanism to sense temperature
- High-quality snap-action switch
- Factory preset
- Shock and vibration resistant
- Available in a wide range of configurations
- NEMA 4, 13

Operating Specifications

Set Point Range	40° — 300°F	(4° — 149°C)
Set Point Tolerance	±5°F	(2.8°C)
Maximum Operating Temperature	100°F above set point (325°F max)	
Differential	8 — 16°F	
Current Rating	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
Media Connection	Standard: Brass (<i>Optional: 303 SS, 316 SS</i>)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Maximum External Pressure	500 PSI	
Unit Weight	.19 lbs	
Installation Torque	15 ft lbs	
	Smaller than 3/8" NPT Male = 5 — 10 ft lbs	

CHECK OUT
nasonptc.com/configure
to create your own custom CAD file

How to Order (Example: Part Number: **TM - 6A - 120R / WL** *)


TM - 6 A - 1 2 0 R / WL *				
Media Connection	Circuit Form	Fixed Set Point	Set Point Direction	Electrical Options
1 1/2" NPT Male	A SPST-NO	40°F — 300°F (5° Increments)	R Rising	WL Wire Leads 18"
2 3/8" NPT Male	B SPST-NC		F Falling	QC 1/4" Spade Connection
6 M16 x 1.5	C SPDT			WP Weather Pack
7 1/2" BSPP Male (G1/2)				HR DIN43650A Connector
16 3/8" — 19 BSPT/JIS				MP Metri-Pack
27 M22 x 1.5 SAE J2244				AT 10 A @ 125/250 VAC 5 A @ 30 VDC
45 1/2" BSPP 303 SS				GG Internal Ground
				AU Gold Plate/Alloy for low currents

* Defaults to Screw Terminals

For more [media connections](#), see pages 32-33.

For all available [optional configurations](#), see page 34.

For more [electrical connections](#), see page 7.

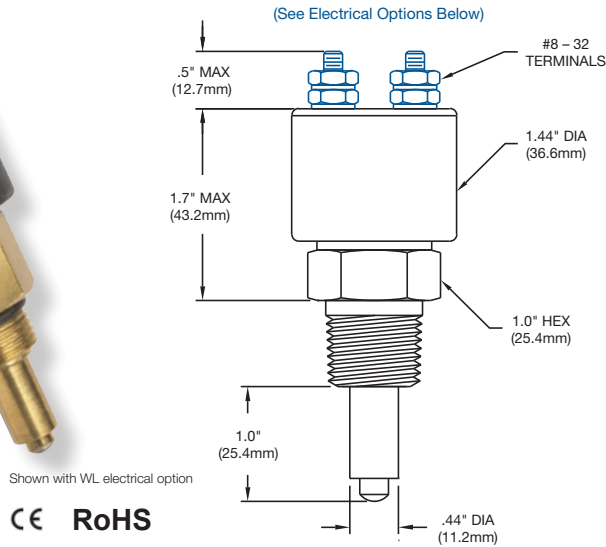

CE RoHS

Features

- Utilizes bellows mechanism to sense temperature
- High-quality snap-action switch
- Factory preset
- Shock and vibration resistant
- Available in a wide range of configurations
- NEMA 4, 13

Operating Specifications

Set Point Range	40° — 300°F	(4° — 149°C)
Set Point Tolerance	±5°F	(2.8°C)
Maximum Operating Temperature	100°F above set point (325°F max)	
Differential	8 — 16°F	
Current Rating	10 A @ 125/250 VAC	5 A @ 30 VDC
Media Connection	Standard: Brass (<i>Optional: 303 SS, 316 SS</i>)	
Circuit Form	SPST-NO, SPST-NC or SPDT	
Electrical Connection	See Order Chart Below for Options	
Maximum External Pressure	500 PSI	
Unit Weight	.23 lbs	
Installation Torque	15 ft lbs	
	Smaller than 3/8" NPT Male = 5 — 10 ft lbs	

CHECK OUT
nasonptc.com/configure
 to create your own custom CAD file

How to Order (Example: Part Number: HT - 2A - 100R / WL)


Media Connection		Circuit Form		Fixed Set Point		Set Point Direction		Electrical Options	
1	1/2" NPT Male	A	SPST-NO	40°F — 300°F	(5° Increments)	R	Rising	WL	Wire Leads 18"
2	3/8" NPT Male	B	SPST-NC			F	Falling	QC	1/4" Spade Connection
6	M16 x 1.5	C	SPDT					WP	Weather Pack
7	1/2" BSPP Male (G1/2)							HR	DIN43650A Connector
16	3/8" — 19 BSPT/JIS							MP	Metri-Pack
27	M22 x 1.5 SAE J2244							AH	25 A @ 277 VAC 5 A @ 30 VDC
45	1/2" BSPP 303 SS							GG	Internal Ground
								AU	Gold Plate/Alloy for low currents

* Defaults to Screw Terminals

For more [media connections](#),
see pages 32-33.

For all available [optional configurations](#),
see page 34.

For more [electrical connections](#),
see page 7.

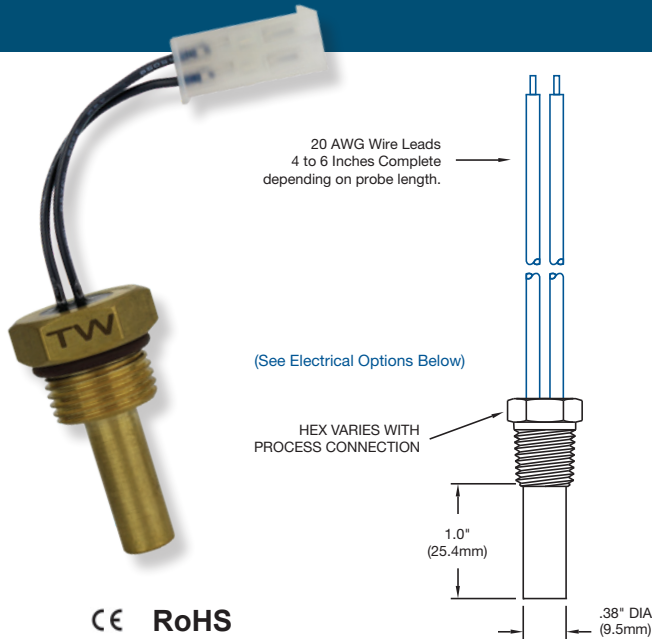

CE RoHS

Features

- Snap action immersion temperature switch
- Factory preset temperature
- Hysteresis built in
- Available in a wide range of configurations
- Economical and compact
- NEMA 4, 13

Operating Specifications

Set Point Range	120° — 285°F	(50° — 140°C)
Set Point Tolerance	±5°F	(2.8°C)
Maximum Temperature	163°F	(325°C)
Current Rating	10 A @ 120 VAC	5 A @ 240 VDC 4 A @ 12VDC
Differential	30%C of the set point (<i>nominal</i>)	
Cycle Life	10,000 cycles (<i>Depending on amp draw</i>)	
Probe Length	1.0" standard	
Media Connection	Standard: Brass (<i>Optional: 303 SS, 316 SS</i>)	
Circuit Form	Normally close or normally open	
Electrical Connection	Wire leads standard - See options below	
Maximum External Pressure	5000 PSI	

CHECK OUT
nasonptc.com/configure
to create your own custom CAD file

How to Order (Example: Part Number: **TW - F3A - 140R / WL** *)

Probe Length		Media Connection		Circuit Form		Fixed Set Point		Set Point Direction		Electrical Options	
D	1/2"	1	1/2" NPT Male	A	SPST-NO	120°F — 285°F	(5° Increments)	R	Rising	WL	Wire Leads
E	3/4"	2	3/8" NPT Male	B	SPST-NC					QC	1/4" Disconnects
F	1"	3	1/4" NPT Male							WP	Weather Pack
H	1-1/2"	5	3/4" SAE O-Ring (-8)							WD	Deutsch DT04-2P
J	2"	17	M18 x 1.5 SAE							MP	Metri-pack
		26	M14 x 1.5 SAE								
		32	M16 x 1.5 SAE								

For more [media connections](#),
see pages 32-33.

For all available [optional configurations](#),
see page 34.

For more [electrical connections](#),
see page 7.

Temperature Switches

Option	Base Thread Size*	TD	TM/HT	TT Model Probe Code					
				D 1/2" Probe	E 3/4" Probe	F 1" Probe	G 1-1/4" Probe	H 1-1/2" Probe	J 2" Probe
1	1/2 NPT Male	•	•	•	•	•	•	•	•
2	3/8 NPT Male	•	•	•	•	•		•	•
3	1/4 NPT Male			•	•	•		•	•
4	3/8 NPT (1PC)		•						
5	3/4 — 16 SAE O-Ring (-8) J514	•	•	•	•	•		•	•
6	M16 x 1.5 NON SAE		•	•	•	•			•
7	1/2 BSPP (G1/2)	•	•		•				•
8	1/2 NPT (1PC)		•						
9	3/8 NPT (Short) NON SAE		•						
10	M14 x 1.5 (Nickel Plated) NON SAE				•				
11	M14 x 1.5 NON SAE				•	•			
12	1/2 NPT (Nickel Plated)		•			•	•		
13	1/4 NPT (316SS)			•	•	•			
14	1/2 BSPP Extended		•						
15	3/4 — 16 SAE O-Ring (-8) Short J514		•						
16	3/8 — 19 BSPT (R3/8)	•	•	•			•		
17	M18 x 1.5 SAE J2244/3 O-Ring	•	•	•	•	•			
18	1/4 NPT (Nickel Plated)			•	•				
19	1/2 NPT (316SS-1PC)		•						
20	1/2 NPT (Very Short)		•						
21	3/8 NPT (Very Short)		•						
22	M16 x 1.5 45° Flare				•				
23	1/2 BSPT (R1/2)	•	•			•			
24	1/2 NPT (316SS)					•			
25	3/8 NPT (Nickel Plated) 1PC		•						
26	M14 x 1.5 SAE J2244/3 O-Ring			•	•	•			
27	M22 x 1.5 SAE J2244/3 O-Ring	•	•			•			
28	1/4 — 19 BSPT (R1/4)				•				
29	3/8 — 19 BSPP (G3/8)				•			•	

*Call Nason at **800.229.4955** if you don't see the media connection that fits your application. **Note:** Consult factory for materials and stock.

Temperature Switches

Option	Base Thread Size*	TD	TM/HT	TT Model Probe Code					
				D 1/2" Probe	E 3/4" Probe	F 1" Probe	G 1-1/4" Probe	H 1-1/2" Probe	J 2" Probe
30	3/8 NPT (316SS)			•	•	•			
31	3/4 — 16 UNF (304 SS)		•						
32	M16 x 1.5 (SAE) J2244/3								
33	5/8 — 18 SAE J513 45° Flare			•	•				
34	1/2 NPT (Short) Male		•						
35	M12 x 1.5 SAE J2244/3			•		•			
36	3/4 — 16 SAE O-Ring (Nickel Plated)								
37	M14 x 1.5 Taper Thread								
38	9/16 — 18 SAE J514 O-Ring (-6)	•		•	•	•	•	•	•
39	M16 x 2.0			•					
40	1/2 — 20 UNF SAE J514 O-Ring (-5)			•		•			
41	3/8 — 24 SAE J514 O-Ring (-3)			•					
42	1/8 NPT Male			•		•			
43	1/4 — 19 BSPP (G1/4)			•		•			
44	M16 x 1.5 303 SS					•			
45	1/2 BSPP 303 SS (G1/2)	•	•						
46	M14 x 1.25					•			
47	M16 x 1.5 45° Flare			•		•			
48	7/16 — 20 SAE J514 O-Ring (-4)			•		•			
49	1 1/16 — 12 SAE J514 O-Ring (-12)	•		•					
50	1/8 — 28 BSPT (R1/8)			•					
51	M20X 1.5 Taper								
52	3/8 NPT 303 SS Male								
53	M16 X 1.5 For Washer			•	•	•		•	•
54	M10 X 1.5								
55	1/8 — 28 BSPP (G 1/8)			•					
56	M12 x 1.5 For Washer			•					
57	3/8 — 19 BSPP Washer (G3/8)			•					
58	1/4 — 19 BSPP (G1/4) 316 SS					•			
59	7/8 — 14 SAE J514 O-Ring (-10)		•						
60	3/4 — 16 SAE J514 O-Ring (-8)		•						
61	M10 x 1.0						•		
62	3/4 — 16 for Washer Seal			•					

*Call Nason at **800.229.4955** if you don't see the media connection that fits your application. **Note:** Consult factory for materials and stock.

Temperature Switch Part Number Configuration

(Complete open boxes only. Shaded boxes should have been previously completed on individual switch pages.)

CHECK OUT
nasonptc.com/configure
 to create your own custom CAD file

Model	Probe Length	Media Connector	Circuit Form	Set Point		Setting Direction	Wire Length Settings	Electrical Connection	Additional Options			Variant #*
									1	2	3	

Wire Length Settings

- 1 3" Wire Length
- 2 6" Wire Length
- 3 12" Wire Length
- 4 18" Wire Length
- 5 24" Wire Length
- 6 36" Wire Length
- 7 48" Wire Length
- 8 60" Wire Length
- 9 Special Wire Length

Electrical Connection

HF	DIN43650A 1/2" Conduit (Plug & Receptacle)
HH	DIN43650A (Plug Only)
HR	DIN43650A Strain Relief (Plug & Receptacle)
HP	9.4mm DIN (Plug Only)
HM	9.4mm DIN (Plug & Receptacle)
MP	Metri-Pack Female 280 Series Sealed (Nason Standard)
NP	Metri-Pack Male 280 Series Sealed
CP	Metri-Pack Female 150 Series Sealed
DP	Metri-Pack Male 150 Series Sealed
PP	Boot (Military Connector)
QC	1/4" Male Spade Quick Connect
WL	Wire Leads
WP	Weather Pack (Female)
TP	Weather Pack (Male)
EL	1/2" NPT Male Conduit
EF	1/2" NPT Female Conduit
WD	Deutsch Receptacle (DT04)
PD	Deutsch Plug (DT06)
HL	Lighted DIN (Plug & Receptacle)
ES	M12 - 4PIN
CL	Sheathed 18 AWG Primaries
SL	SJO Cable

Additional Options

- 1. Contacts****
 - AT** 10 A @ 125/250 VAC
5 A @ 30 VDC
 - AU** Gold Plate/Alloy (for low currents)
 - AH** 25 A @ 277 VAC
5 A @ 30 VDC
- 2. Ground**
 - GG** Internal Ground
- 3. Other**
 - VL** Convolute (for wire leads)

* Variant # identifies this configuration as unique to a specific customer or application.

** Ask about our new environmentally sealed snap-action switch.

Temperature Switches

So we can better meet your application needs, please take a moment to fill out this operation specifications form. Nason will provide a sample to your specifications.

1 Media: _____

2 Set Point: Rising _____ (°F or °C) Falling _____ (°F or °C)

3 Differential: ☐ Yes ☐ No

4 Circuit Form: ☐ SPST-NO ☐ SPST-NC ☐ SPDT

5 Circuit: Electrical ☐ AC _____ V ☐ DC _____ V
 Load (Amps) _____ ☐ Resistive ☐ Inductive Inrush _____

6 Pressure: System (Normal) _____ (Maximum) _____

7 Temperature: System (Normal) _____ (Maximum) _____ (Minimum) _____
 Ambient (Normal) _____ (Maximum) _____ (Minimum) _____

8 Media Connection: _____

9 Electrical Connection: _____

10 Cycles: _____ per hour Other (describe): _____

11 Other Special Requirements (attach separate sheet if necessary): _____

12 System: ☐ New Design ☐ Redesign

13 Application: What will switch control? (Attach circuit diagrams if available) _____

14 Prototype(s) Required by (Date): _____

15 Estimated Annual Usage: _____ Target Net Price: _____

Firm: _____

Address: _____

Project Number or Name: _____

Name & Title: _____ Phone: _____

Email Address: _____

[illegible]

TRANSDUCERS



- New models – NTS, NT110, NT41, NES, NESD, NTBT, and NTBT-DL
- Basic to highly customized models
- Hydraulic and pneumatic designs
- Models with accuracy ranges of 1%, .4% and .25%
- Vacuum ranges to 10,000 PSI
- IP69K seal available for the NT25, enabling high-pressure wash down capability
- Compact designs
- Custom outputs and ranges available
- Multiple industry applications

Specifications

Performance

Accuracy	Performance @ 25°C (77°F)
Overrange Protection	0.25% BFSL (includes: non-linearity, hysteresis and non-repeatability)
Pressure Range	2x Rated Pressure or optional 4x and 10x
Burst Pressure	see ordering chart - up to 6000 PSI (690 bar) (optional higher ranges available)
Pressure Cycles	5x or 20,000 PSI, whichever is less
Update Time	>100 million
Digital Output	<=1msec
	Optional digital output for pressure or temp switch point
	(not available on 4-20mA output units)

Environmental Data

Temperature	
Compensated Temperatures	-40° to 100°C (-40 to 212°F)
Operating Temperatures	-40° to 100°C (-40 to 212°F)
Storage	-40° to 125°C (-40° to 250°F)
Total Error Band (TEB)	0.9%
Stability	0.25% FS typical (1 year)
Shock	100g, 6 ms, 1/2 sine per EN 60068-2-27, EN 60068-2-29
Vibration	12g peak, 10 to 2000 Hz per EN60068-2-6, EN60068-2-64
EMI/RFI Protection	Yes
Rating	Up to IP-69K available (high pressure wash down)


Mechanical Configuration

Pressure Connections	See ordering chart
Wetted Material	17-4PH stainless steel (for other materials consult factory)
Electrical Connection	9.4 Din, IP-69K 4 pin M12 Connector
Case (housing)	304 stainless steel

Electrical Data



Excitation	4.0-28 VDC, Typ (must be at least 0.3V above full output voltage) (7.5 VDC min for 4-20mA)
Output	see ordering chart
Output Load	0-800 Ohms @ 10-28 VDC for current output 10K Ohms minimum for voltage outputs
Current Consumption	25mA max (current output), <5mA (voltage output) without digital output, <8mA with digital output
Output Noise	<2mV RMS
Reverse Polarity Protection	Yes
Zero Offset	1%
CE Approval	Yes. Shield must be attached to connector housing (not tested with cable lengths over 30 meters).
Set Point for Either Pressure or Temperature	For pressure, this is done by selecting a percentage of your transducer's full range and this will be the set point (40% of a 1000 PSI range will have the set point at 400 PSI) "P40". For temperature, simply select in degrees C where you want the set point to be (selecting 40°C will be represented by "T40" in the part number).
Maintenance Mode	The maintenance mode output indicates 1/2 bridge failure.

Electrical Connections

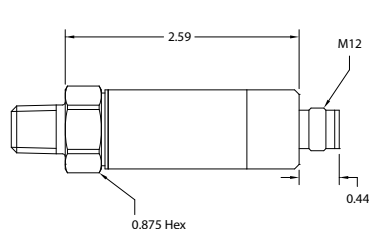

NT25 M12 Pin Assignments

Voltage Units	Current Units
Pin 1 = - Power Supply	Pin 1 = + Power Supply
Pin 2 = Output	Pin 2 = N/C
Pin 3 = Common	Pin 3 = Output
Pin 4 = Digital Output (optional)	Pin 4 = N/C

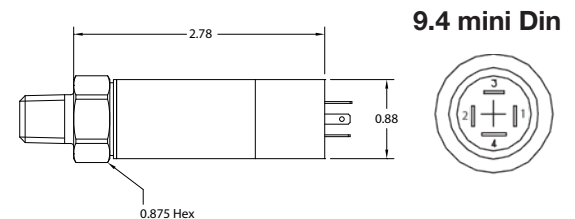

NT25 9.4 Pin Assignments

Voltage Units	Current Units
Pin 1 = + Power Supply	Pin 1 = + Power Supply
Pin 2 = - Power Supply	Pin 2 = Output
Pin 3 = Output	Pin 3 = N/C
Pin 4 = Digital Output (optional)	Pin 4 = N/C



CE RoHS

Features

- Vacuum ranges to 10,000 PSI
- Various outputs
- Compact designs
- 316 stainless steel wetted parts
- Low cost
- Better 0.4% accuracy
- Custom outputs and ranges available
- OEM tested and approved

Application

- Hydraulic/mobile hydraulic
- Pneumatic systems
- Food and beverage Industry
- Refrigeration systems
- Pumps and compressors
- Energy and water management
- Construction and agricultural equipment

Description

The NT40 Series Pressure Transducer utilizes piezoresistance technology in an all stainless steel body. It is compact in size, has long term stability, is easy to install, and is very economical, as well as reliable.

The NT40 sets a new price-performance standard for low cost, high volume commercial and industrial applications.

How to Order (Example: Part Number: **NT40 - 03 - B - 0500 - G - Q00 - 5**)

Model

NT40 - 03 - B - 0500 - G - Q00 - 5

Media Connection

01 = 1/8" NPT Male

03 = 1/4" NPT Male

09 = 7/16-20"

10 = 9/16-18" UNF Male

13 = G1/4" Male

**

Output

B = 4-20mA

C = 0-5 vdc

D = 0-10 vdc

K = Ratio metric .5-4.5 vdc

**

Pressure Range (PSI)

V000

V015

V045

V085

0015

0025

0050

0100

0250

0500

1000

3000

5000

**

Pressure Type

G = Gauge

Electrical Connection

Q00 = M12

D00 = 9.4 mini DIN

**

Accuracy

5 = 0.4%

**

** Consult factory for further OEM options.


Specifications

Input	
Supply Voltage	8-28 VDC
Pressure Range	VAC to 10,000 PSI
Proof Pressure	1.5 x full scale
Burst Pressure	3 x full scale
Fatigue Life	More than 4 million cycles

Performance	
Accuracy	0.4%
Stability	0.2% full scale
Compensated Temperatures	-10 to 75°C (14 to 167°F)
Operating Temperatures	-20 to 80°C (-4 to 176°F)
Zero and Span Offset Tolerance	1.5%

Mechanical Configuration	
Pressure Port	1/4 NPT (standard) *
Electrical Connection	M12 *
Sealing Rating	IP67 when used with M12 cable assembly
Diaphragm Material	0-75 PSI = 316 SS • 100-1500 PSI = Ceramic • 2,000-10,000 PSI = 17 - 4 SS

For best performance, use shielded cables. Mating cable assemblies sold separately. * Consult factory for further OEM options.

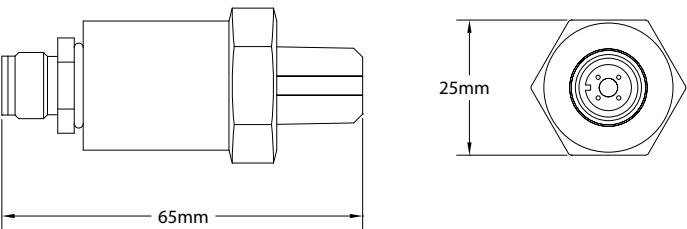

Electrical Connections

Signal	Function	Color	Pin	Electrical Connector
0-5V	Supply V +	Red	1	DIN 4 pin (9.4)
	Com	Black	2	
	Output	White	3	
4-20mA	Supply V	Red	1	
	Output	Black	2	
0-5V	Supply V +	Black	1	M12
	Output +	Red	2	
	Com	White	3	
4-20mA	Supply V +	Brown	1	
	Output	Blue	3	



CE RoHS

Features

- Vacuum ranges to 285 PSI or 3 to 10,000 PSI
- Various outputs
- Compact designs
- 316 stainless steel housing
- All stainless steel wetted parts
- Low cost
- Better 0.4% accuracy
- Custom outputs and ranges available
- OEM tested and approved
- Low power consumption
- High 125°C (257°F) operating temperature

Application

- Hydraulic/mobile hydraulic
- Pneumatic systems
- Food and beverage Industry
- Refrigeration systems
- Pumps and compressors
- Energy and water management
- Construction and agricultural equipment

Description

The NT41 Series Pressure Transducer utilizes piezoresistance technology in an all stainless steel body. It is compact in size, has long term stability, is easy to install, and is very economical, as well as reliable.

The NT41 sets a new price-performance standard for low cost, high volume commercial and industrial applications.

How to Order (Example: Part Number: NT41 - 03 - B - 0500 - G - Q00 - 5 - ET)

Model

NT41	-	03	-	B	-	0500	-	G	-	Q00	-	5	-	ET
		Media Connection (Pressure Port)			Output	Pressure Range (PSI)			Pressure Type	Electrical Connection			Accuracy	Optional Extended Temperature
		01 = 1/8" NPT Male			B = 4-20mA	V000			G = Gauge	D00 = 9.4 mini DIN			5 = 0.4% **	ET = -40° C – 125° C
		03 = 1/4" NPT Male			C = 0-5 vdc	V015				B00 = 3 pin Packard				
		09 = 7/16-20"			D = 0-10 vdc	V045				W3P = 3 pin Deutsch				
		10 = 9/16-18" UNF Male			K = Ratio metric .5-4.5 vdc	V085				W4P = 4 pin Deutsch				
		13 = G1/4" Male			**	V135				Q00 = M12				
		**				V185				**				
						V285								
						0015								
						0025								
						0050								
						0100								
						0250								
						0500								
						1000								
						3000								
						5000								
						**								

** Consult factory for further OEM options.


Specifications

Input	
Supply Voltage	8-28 VDC
Pressure Range	VAC to 10,000 PSI
Proof Pressure	3 — 6,000 PSI = 3x 6,000 — 10k PSI = 2x
Burst Pressure	3 — 6,000 PSI = 4x 6,000 — 10k PSI = 3x
Fatigue Life	More than 4 million cycles


Performance	
Accuracy	0.4%
Stability	0.2% full scale
Compensated Temperatures	-10 to 100°C (14 to 212°F)
Operating Temperatures	-20 to 125°C (-4 to 257°F)
Zero and Span Offset Tolerance	1.5%

Mechanical Configuration	
Pressure Port	1/4 NPT (standard) *
Electrical Connection	M12*, 3 pin Deutsch, 4 pin Deutsch
Sealing Rating	IP67 when used with M12 cable assembly
Wetted Parts	316 stainless steel


For best performance, use shielded cables. Mating cable assemblies sold separately. * Consult factory for further OEM options.

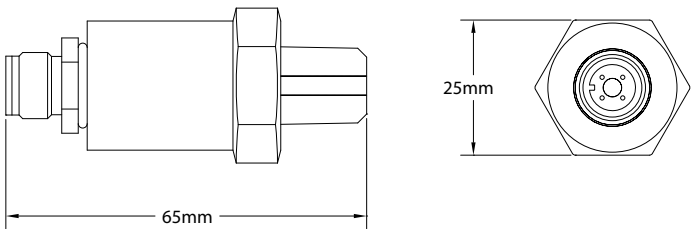

Electrical Connections

Signal	Function	Color	Pin	Electrical Connector
0-5V	Supply V +	Brown	1	M12 
	Output +	White	2	
	Com	Blue	3	
4-20mA	Supply V	Brown	1	
	Output	Blue	3	

x4	Pin1	Pin2	Pin3	Pin4
mA	Output+	Supply+	N/C	N/C
V	COM	Supply+	N/C	Output+



Transducer View
Deutsch DT04-4P



CE RoHS

Features

- Vacuum ranges to 10,000 PSI
- Various outputs
- Compact designs
- 316 stainless steel wetted parts
- Low cost
- Industrial 1% accuracy
- Custom outputs and ranges available
- OEM tested and approved

Application

- Hydraulic/mobile hydraulic
- Pneumatic systems
- Food and beverage industry
- Refrigeration systems
- Pumps and compressors
- Energy and water management
- Construction and agricultural equipment

Description

The NT100 Series Pressure Transducer utilizes piezoresistance technology in an all stainless steel body. It is compact in size, has long term stability, is easy to install, and is very economical, as well as reliable.

The NT100 sets a new price-performance standard for low cost, high volume commercial and industrial applications.

How to Order (Example: Part Number: NT100 - 03 - B - 0500 - G - D00 - 4)

Model

Media Connection	Output	Pressure Range (PSI)	Pressure Type	Electrical Connection	Accuracy
NT100 - 03 - B - 0500 - G - D00 - 4					
01 = 1/8" NPT Male	B = 4-20mA	V000	G = Gauge	D00 = 9.4 mini DIN	4 = 1% **
03 = 1/4" NPT Male	C = 0-5 vdc	V015		B00 = 3 pin Packard	
09 = 7/16-20"	D = 0-10 vdc	V045		Q00 = M12	
10 = 9/16-18" UNF Male	K = Ratio metric	V085			
13 = G1/4" Male	.5-4.5 vdc				
**	**	0015			
		0025			
		0050			
		0100			
		0250			
		0500			
		1000			
		3000			
		5000			
		**			

** Consult factory for further OEM options.


Specifications

Input	
Supply Voltage	8-28 VDC
Pressure Range	VAC to 10,000 PSI
Proof Pressure	1.5 x full scale
Burst Pressure	3 x full scale
Fatigue Life	More than 4 million cycles

Performance	
Accuracy	1%
Stability	0.2% full scale
Compensated Temperatures	-10 to 75°C (14 to 167°F)
Operating Temperatures	-20 to 80°C (-4 to 176°F)
Zero and Span Offset Tolerance	1.5%

Mechanical Configuration	
Pressure Port	1/4 NPT (standard) *
Electrical Connection	9.4 mini DIN, 3 pin Packard *
Sealing Rating	IP65 with standard 9.4 DIN cable
Wetted Parts	316 stainless steel

For best performance, use shielded cables. Mating cable assemblies sold separately. * Consult factory for further OEM options.

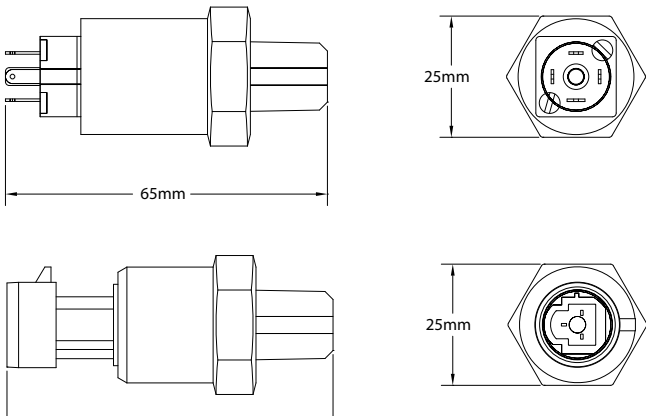

Electrical Connections

Signal	Function	Color	Pin	Electrical Connector
0-5V	Supply V +	Red	1	DIN 4 pin (9.4)
	Com	Black	2	
	Output	White	3	
	N/A	N/A	4	
4-20mA	Supply V	Red	1	3 pin Packard
	Output	Black	2	
0-5V	Com	-	A	
	Supply +	-	B	
	Output +	-	C	
4-20mA	Output	-	A	
	Supply +	-	B	



CE RoHS

Features

- Vacuum ranges to 285 PSI or 3 to 10,000 PSI
- Various outputs
- Compact designs
- 316 stainless steel housing
- All stainless steel wetted parts
- Low cost
- Industrial 1% accuracy
- Custom outputs and ranges available
- OEM tested and approved
- Low power consumption
- High 125°C (257°F) operating temperature

Application

- Hydraulic/mobile hydraulic
- Pneumatic systems
- Food and beverage industry
- Refrigeration systems
- Pumps and compressors
- Energy and water management
- Construction and agricultural equipment

Description

The NT110 Series Pressure Transducer utilizes piezoresistance technology in an all stainless steel body. It is compact in size, has long term stability, is easy to install, and is very economical, as well as reliable.

The NT110 sets a new price-performance standard for low cost, high volume commercial and industrial applications.

How to Order (Example: Part Number: **NT110 - 03 - B - 0500 - G - D00 - 4**)

Model

Media Connection (Pressure Port)	Output	Pressure Range (PSI)	Pressure Type	Electrical Connection	Accuracy
NT110 - 03 - B - 0500 - G - D00 - 4					
01 = 1/8" NPT Male	B = 4-20mA	V000	G = Gauge	D00 = 9.4 mini DIN	4 = 1% **
03 = 1/4" NPT Male	C = 0-5 vdc	V015		B00 = 3 pin Packard	
09 = 7/16-20"	D = 0-10 vdc	V045		W3P = 3 pin Deutsch	
10 = 9/16-18" UNF Male	K = Ratio metric .5-4.5 vdc	V085		W4P = 4 pin Deutsch	
13 = G1/4" Male	**	V135		Q00 = M12	
**		V185		**	
		V285			
		0015			
		0025			
		0050			
		0100			
		0250			
		0500			
		1000			
		3000			
		5000			
		**			

** Consult factory for further OEM options.

Specifications

Input

Supply Voltage	8-28 VDC
Pressure Range	VAC to 285 PSI or 3 to 10,000 PSI
Proof Pressure	3 — 6,000 PSI = 3x 6,000 — 10k PSI = 2x
Burst Pressure	3 — 6,000 PSI = 4x 6,000 — 10k PSI = 3x
Fatigue Life	More than 4 million cycles


Performance

Accuracy	1% FS, BFSL
Stability	0.2% full scale
Compensated Temperatures	-10 to 100°C (14 to 212°F)
Operating Temperatures	-20 to 125°C (-4 to 257°F)
Zero and Span Offset Tolerance	1.5%
Current Consumption	Approx 3mA for voltage output, 22mA for current output (4-20mA)
Shock	50g, 11ms, 1/2 sign
Vibration	11g peak from 10 to 400 Hz



Mechanical Configuration



Pressure Port	1/4 NPT (standard) *
Electrical Connection	9.4 mini DIN, 3 pin Packard *
Ingress Rating	IP65 with standard 9.4 DIN cable
Housing	316 stainless steel
Diaphragm Material	316 SS <1500 psi, 17-4 SS >1500 PSI, wetted parts are SS, no internal O-Rings
Approvals	CE

For best performance, use shielded cables. Mating cable assemblies sold separately. * Consult factory for further OEM options.

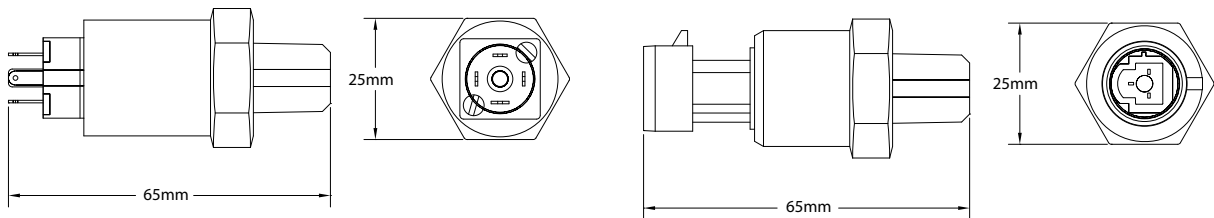

Electrical Connections

Signal	Function	Color	Pin	Electrical Connector
0-5V	Supply V +	Red	1	DIN 4 pin (9.4) 
	Com	Black	2	
	Output	White	3	
	N/A	N/A	4	
4-20mA	Supply V	Red	1	Black
	Output	Black	2	
0-5V	Com	Black	A	3 pin Packard 
	Supply +	Red	B	
	Output +	White	C	
4-20mA	Output	Black	A	
	Supply +	Red	B	



Features

- **Operating temperature:** -40° C to 90° C
- **Power supply:** 9 VDC to 28 VDC
- **Power supply current:** 35mA maximum
- **Relay output:** 250 VAC/220 VDC, 10A maximum
- **Relay type:** normally open or normally closed
- **Media connection:** 1/4" NPT standard
(consult factory for other options)
- **Pressure ranges:** up to 10,000 PSI
- **Set point and hysteresis:** factory programmable
- **UL recognized component**




Description

The NES Electronic Pressure Switch Digital Technology brings a new level of performance to the pressure switch world. The NES features a solid stainless steel long life header/diaphragm for demanding applications where o-rings and creeper compatibility are a thing of the past. The NES houses the proprietary redundant

bridge circuit for high-shock and high-vibration environments making it ideal for off road/mobile hydraulic applications where downtime is not an option. These industry firsts combined with the factory programmable set-point and hysteresis allows for low-cost custom solutions with next day shipments.

How to Order (Example: Part Number: **NES - 3A3 - 50R / 015 HR AT**)

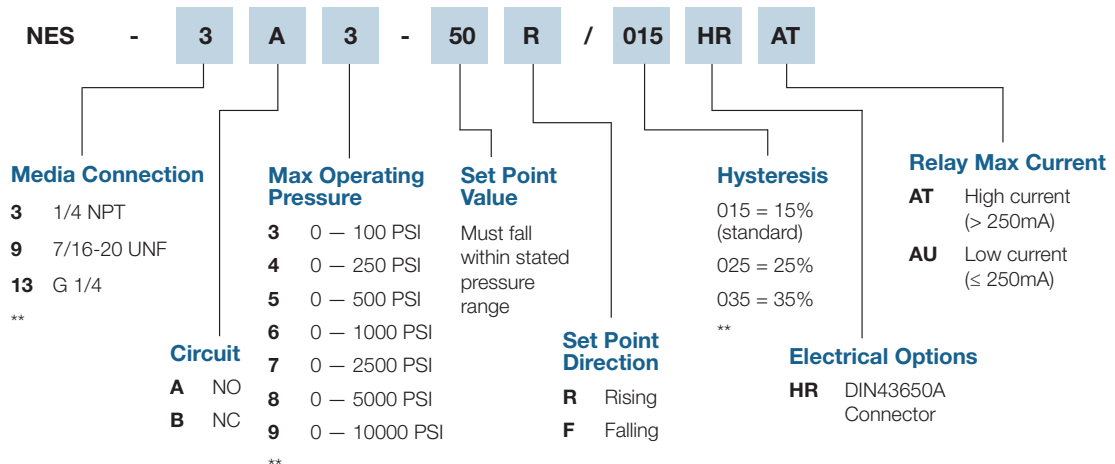

Pressure ranges and outputs listed above are quick ship versions.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use. While we provide application assistance personally, through our literature and the Nason website, it is up to the customer to determine the suitability of the product in the application.

Specifications

Performance

Accuracy:	Performance @ 25° C (77° F) 0.5% of max operating pressure (see ordering code)
Overrange Protection:	2x Rated Pressure and optional 4x see ordering chart
Pressure Range:	- up to 10,000 PSI (689 bar)
Burst Pressure:	5x or 20,000 PSI, whichever is less
Relay Life:	>2 million @ 100mA at 240 VAC, Typ*
Update Time:	≤1msec
Relay Output:	250 VAC/220 VDC, up to 5A standard 10A Max
Relay Max Current:	Low Current ≤ 250mA, High Current > 250mA, 10A Max (increased current results in reduced lifecycle*)

Environmental Data

Compensated Temperatures:	-40° to 90° C (-40° to 194° F)
Operating Temperatures:	-40° to 90° C (-40° to 194° F)
Storage:	-40° to 125° C (-40° to 250° F)
TEB:	1% of max operating pressure (see ordering code)
Long Term Drift:	0.2% FS/year (non-cumulative)
Shock:	2g, 11 ms, 1/2 sine
Vibration:	4g, peak, 30 to 400 Hz
EMI/FRI Protection:	Yes
Rating:	IP65
Approvals:	UL (approved connector, max ambient temperature at 55° C for L relay version; max ambient temperature at 20° C for H relay version)

Mechanical Configuration

Media Connection:	1/4" NPT Male (standard)
Wetted Material:	17-4PH stainless steel
Electrical Connection:	Large DIN
Case:	(housing) 304 stainless steel/polycarbonate plastic

Electrical Data


Excitation:	9-28 VDC, Typ
Output:	Relay output
Current Consumption:	35mA max
Reverse Polarity Protection:	Yes
Set Points:	No set points in vacuum range, 5 PSI Min set point with <100 PSI, 10% of configured pressure min set point >100 PSI range

Mating connectors and cable assemblies sold separately.

*Refer to relay datasheet for lifecycle information: TE connectivity, high current relay, product code PB114024, part number 9-1415029-1.

Electrical Connections

Large DIN per DIN-43650

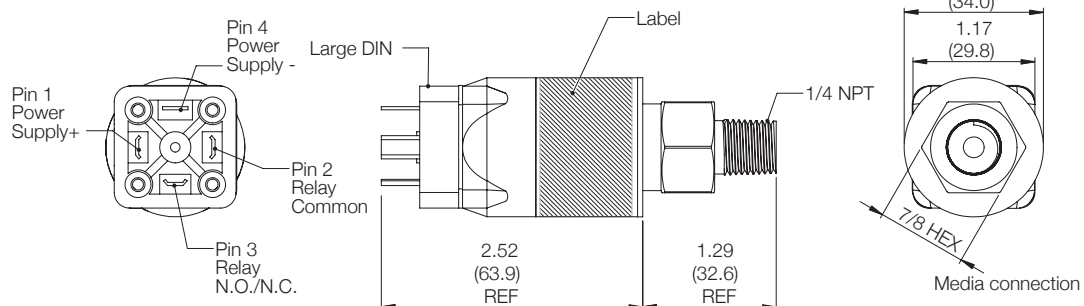

Large DIN per DIN-43650

Pin 1:	Power supply +: 9 VDC to 28 VDC
Pin 2:	Relay common
Pin 3:	Relay N.O./N.C.
Pin 4:	Power supply -

Dimensions are in inches (mm) and for reference only.



Features

- **Compensated temperature:** -40° C to 85° C
- **Operating temperature:** -40° C to 100° C
- **Power supply:** 10.5 VDC to 28 VDC
- **Display:** 4-digit, bi-color display (red or green)
- **Outputs:** Digital : 250 mA max (PNP) or 200 mA max (NPN), or optional analog output: up to 10.5 VDC or up to 28 VDC (field selectable)
- **Media connection:** 1/4" NPT, 7/16-20 UNF, G 1/4
- **Pressure ranges:** Wide variety up to 10K psig

Description


What makes the NESD model stand apart is the unique LED display - which allows for 360° scrolling, or you can lock the display in one location. It also features field-programmable set points and hysteresis.

The NESD model incorporates redundant sensing technology, allowing for notification that

the sensor needs to be replaced before it might fail (maintenance mode), eliminating operational downtime.

The NESD model pressure switch/transducer comes standard with one digital output (NPN or PNP), optional analog output, operates from 10.5 to 28 VDC, and is IP67 certified.

How to Order (Example: Part Number: **NESD - 3D1 - 0050/ES**)

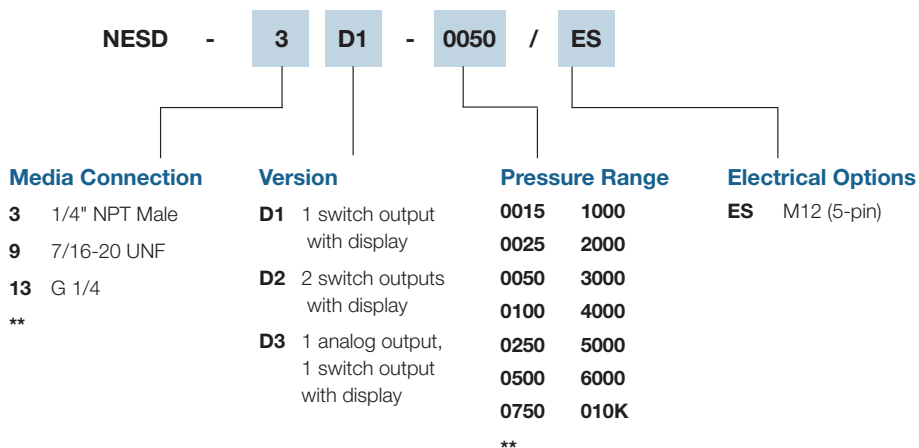

** Consult factory for further OEM options. Pressure ranges and outputs listed above are quick ship versions.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use. While we provide application assistance personally, through our literature and the Nason website, it is up to the customer to determine the suitability of the product in the application.

Specifications

Performance

Accuracy:	Performance @ 25° C (77° F) 0.5% of max operating pressure
Overrange Protection:	2x Rated Pressure or optional 4x and 10x
Pressure Range:	see ordering chart - up to 10,000 PSI (689 bar)
Burst Pressure:	5x or 20,000 PSI, whichever is less
Pressure Cycles:	>100 million
Update Time:	≤1msec

Environmental Data

Compensated Temperatures:	-40° to 85° C (-40° to 185° F)
Operating Temperatures:	-40° to 100° C (-40° to 212° F)
Storage:	-40° to 125° C (-40° to 257° F)
TEB:	1% BFSL (includes: Non-linearity, Hysteresis and Non-repeatability)
Long Term Drift:	0.2% FS/year (non-cumulative)
Shock:	50g, 11 ms, 1/2 sine
Vibration:	10g, peak, 20 to 2400 Hz
EMI/FRI Protection:	Yes
Rating:	Up to IP67

Mechanical Configuration

Pressure Connections:	1/4" NPT Male, 7/16-20 UNF, G1/4 Male
Wetted Material:	17-4PH stainless steel (for other materials consult factory)
Electrical Connection:	M12 (5-pin)
Case:	(housing) 304 stainless steel and high-impact polycarbonate (display)

Electrical Data



Power Supply:	10.5-28VDC
Output:	10.5 VDC to 28 VDC at 250 mA max (PNP) or 200 mA max (NPN) (digital) up to 10 VDC or up to 20 mA (analog)
Field Programmable:	up to 10 VDC or up to 20 mA (analog)
Output Impedance:	<100 Ohms, Nominal
Current Consumption:	30 mA at 24V/voltage output 40 mA at 12V/voltage output 50 mA at 24V/voltage output 60 mA at 12V/voltage output
Output Noise:	<2mV RMS
Reverse Polarity Protection:	Yes

For best performance use shielded cables.

Mating connectors and cable assemblies sold separately.

Electrical Connections

5-Pin M12

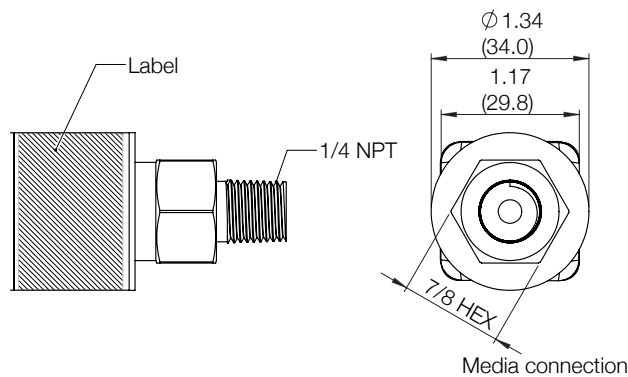

5-Pin M12

Pin 1:	Power supply: 10.5 VDC to 28 VDC
Pin 2:	Digital output #2 (optional) or analog output (optional)
Pin 3:	Power supply common
Pin 4:	Digital output #1
Pin 5:	Maintenance mode output

Dimensions are in inches (mm) and for reference only.



Features

- Connects to smartphones and tablets with BLE (Bluetooth® Low Energy)
- Certified Bluetooth® wireless technology
- Pressure ranges from vacuum to 10,000 psi
- Long battery life (proprietary technology)
- 1% standard accuracy with optional 0.25% ultra high accuracy
- Stainless steel and high-impact polycarbonate construction
- Alarm set points
- Secure field programmable naming
- Patent-pending design
- Schrader, NPT, SAE and G ¼ pressure connection

Description

Another industry first! The first Bluetooth®-certified wireless pressure transducer with long battery life and patent-pending design makes the NTBT a perfect fit for many applications for Industrial and Home Automation. Download the free app, install the transducer and wirelessly connect — no confusing wiring to figure out.

Choose the NTBT for virtually anywhere you’d like to monitor pressure without the use of wires — from pneumatic systems, mobile hydraulics, residential and commercial applications to water, hydraulic, irrigation, pools, medical and sprinkler systems. Because it is built on Nason proprietary technology, the NTBT ensures high quality and high accuracy with Nason’s quick deliveries and low costs.

How to Order (Example: Part Number: **NTBT - 03 - 0015 - 2**)

NTBT	-	03	-	0015	-	2
		Media Connection		Pressure Range		Accuracy
		3 1/4 NPT Male		0050		2 = 0.25%
		9 7/16-20 UNF Male		0100		4 = 1.00%
		13 G 1/4 Male		0250		
				0500		
				0650		
				1000		
				3000		
				5000		
				010K		

Specifications

Performance

Pressure Accuracy:	Performance @ 25° C (77° F) 0.25% or 0.2 psi, whichever is greater, 1% BFSL (includes non-linearity, hysteresis, non-repeatability)
Overrange Protection:	2x Rated Pressure
Pressure Range:	see ordering chart - up to 10,000 psi (690 bar)
Burst Pressure:	5x or 20,000 psi, whichever is less
Pressure Cycles:	>100 million
Update Time:	Bluetooth® wireless technology (1sec)

Environmental Data

Compensated Temperatures:	-10° to 85° C (14 to 185° F)
Operating Temperatures:	-40° to 85° C (-40° to 185° F)
Storage:	-40° to 125° C (-40° to 257° F) without battery
TEB:	3% BFSL (includes: Non-linearity, Hysteresis and Non-repeatability)
Long Term Drift:	0.2% FS/year (non-cumulative)
Shock:	50g, 11 ms, 1/2 sine
Vibration:	10g, peak, 20 to 2400 Hz
EMI/FRI Protection:	Yes
Ingress Rating:	IP-67

Mechanical Configuration

Pressure Connection:	1/4 NPT Male, 7/16-20 UNF Male, G1/4 Male
Wetted Material:	17-4PH stainless steel (for other materials consult factory)
Case:	(housing) 304 stainless steel and high-impact polycarbonate I

Electrical Data

Power Supply:	3.6V Proprietary replacement battery. Battery life: 24 months, typical. Battery life is affected by high and low temperatures. If the battery pack is removed, you must wait 90 seconds to reinstall or unit may lock up.
Battery Removal:	250 feet (line of sight)
Connection Distance:	250 feet (line of sight)
Compatible Devices:	Software: Android - (Version 4.3 or later) iOS - (Current version and previous one) Hardware: Android - Device supports Bluetooth Smart (Version 4.0 and later) iPad Gen 3 - (released March 16, 2012) iPad Gen 4 - (released November 2, 2012) iPad Mini Gen 1 - (released November 2, 2012) iPad Mini Gen 2 - (released November 12, 2013) iPad Air - (released November 1, 2013) iPhone 5 - (released September 21, 2012) iPhone 5C, 5S - (released September 20, 2013) iPhone 6, 6 Plus - (released September 19, 2014) iPhone 6S, 6S plus - (released Sept 25 2015) iPhone 7, 7 plus - (released Sept 16, 2016) iPhone 8, 8 plus iPhone X, Xs, Xs Max

Features

- Connects to smartphones and tablets with BLE (Bluetooth® Low Energy)
- Certified Bluetooth® wireless technology
- Pressure ranges from vacuum to 10,000 psi
- Long battery life (proprietary technology)
- 1% standard accuracy with optional 0.25% ultra high accuracy
- Stainless steel and high-impact polycarbonate construction
- Alarm set points
- Secure field programmable naming
- Patent-pending design
- Number of individual logs: from 15,872 to 32,768
- Email logged files from the **FREE** app



Description

Another Industry First! The first Bluetooth® certified wireless pressure transducer with long battery life and patent- pending design makes the NTBT-DL a perfect fit for many applications for Industrial and Home Automation. The NTBT-DL includes data logging capability to save pressure and temperature data that can be emailed and opened in an excel spread sheet. Download the free app, install the transducer and wirelessly connect - no confusing wiring to figure out.

From HVAC in marine, campers, motorhomes, residential and commercial applications to water, hydraulic, irrigation, pools, medical and sprinkler systems or anywhere you need to monitor pressure without the need of wires.

Because it is built on Nason proprietary technology, the NTBT-DL ensures high quality and high accuracy with quick deliveries, and low costs.

How to Order (Example: Part Number: **NTBT-DL - 03 - 0500 - 2 - T24**)

NTBT-DL	-	03	-	0500 (psi)	-	2	-	T24
		Pressure Connection			Pressure Range			M5 / Temperature Probe
		03 = 1/4" NPT Male			0050			(BLANK) = No M5 connector
		09 = 7/16- 20 UNF Male			0100			(not temp probe capable)
		13 = G1/4 Male			0250			T24 = 24" cable with M5
		42 = 7/16-20 UNF			0500			mating connector and external
		Female			0650			temperature probe
		w/ 45° flare & valve			1000			M5 = M5 connector alone
		depressor (Schrader)			3000			(temp probe capable)
		**			5000			**
					010K			
					**			

** - Consult factory for further OEM options.
 Pressure ranges listed above are quick ship versions.
 All straight-thread o-rings are Viton. It is customer's responsibility to determine compatibility.

Specifications

Performance

Pressure Accuracy:	Performance @ 25° C (77° F) 0.25% or 0.2 psi, whichever is greater, 1% BFSL (includes non-linearity, hysteresis, non-repeatability)
Temperature Accuracy:	±1° C
Overrange Protection:	2x Rated Pressure
Pressure Range:	see ordering chart - up to 10,000 psi (690 bar)
Burst Pressure:	5x or 20,000 psi, whichever is less
Pressure Cycles:	>100 million
Update Time:	Bluetooth® wireless technology (1sec)

Environmental Data

Compensated Temperatures:	-10° to 85° C (14 to 185° F)
Operating Temperatures:	-40° to 85° C (-40° to 185° F)
Storage:	-40° to 125° C (-40° to 257° F) without battery
TEB:	3% BFSL (includes: Non-linearity, Hysteresis and Non-repeatability)
Long Term Drift:	0.2% FS/year (non-cumulative)
Shock:	50g, 11 ms, 1/2 sine
Vibration:	10g, peak, 20 to 2400 Hz
EMI/FRI Protection:	Yes
Ingress Rating:	IP-67
Approvals:	CE

Mechanical Configuration

Pressure Connection:	1/4 NPT Male, 7/16-20 UNF Male, G1/4 Male, 7/16-20 UNF Female w/45° flare & valve depressor
Wetted Material:	17-4PH stainless steel (for other materials consult factory)
Case:	(housing) 304 stainless steel and high-impact polycarbonate I

Electrical Data

Power Supply:	3.6V Proprietary replacement battery. Battery life: 24 months, typical. Battery life is affected by high and low temperatures.
Battery Removal:	If the battery pack is removed, you must wait 90 seconds to reinstall or unit may lock up.
Connection Distance:	250 feet (line of sight)
Compatible Devices:	Software: Android - (Version 4.3 or later) iOS - (Current version and previous one) Hardware: Android - Device supports Bluetooth Smart (Version 4.0 and later) iPad Gen 3 - (released March 16, 2012) iPad Gen 4 - (released November 2, 2012) iPad Mini Gen 1 - (released November 2, 2012) iPad Mini Gen 2 - (released November 12, 2013) iPad Air - (released November 1, 2013) iPhone 5 - (released September 21, 2012) iPhone 5C, 5S - (released September 20, 2013) iPhone 6, 6 Plus - (released September 19, 2014) iPhone 6S, 6S plus - (released Sept 25 2015) iPhone 7, 7 plus - (released Sept 16, 2016) iPhone 8, 8 plus iPhone X, Xs, Xs Max

Data Logging

Measurement Intervals:	From 50ms up to 1hr Fill Until Full: 50ms, 500ms, 1 sec, 5 sec, 10 sec, 30 sec, 1 min, 5 min, 10 min, 20 min, 30 min, 1 hr, 1 day FIFO: 500ms, 1 sec, 5 sec, 10 sec, 30 sec, 1 min, 5 min, 10 min, 20 min, 30 min, 1 hr, 1 day
Recording Temperature:	External temperature probe required to record temperature data
Storage Modes:	Fill Until Full: When memory is full, recording will stop FIFO (First in/First out): When memory is full, recording will start over from the beginning replacing the first recordings with the latest moving forward



Features

- Low cost
- Excellent long-term stability
- Wide temperature measurement range
- Industry standard analog outputs
- 316 stainless steel wetted parts
- 1% accuracy
- OEM tested and approved
- Voltage and current outputs

Application

- Hydraulic/Mobile hydraulic
- Automated systems
- Energy and water management
- Anywhere accurate temperature measurement of fluids is required


Description

The NTS series temperature transducer is built using dependable thermistor-based sensing technology with industry standard voltage or current outputs.

Perfect for a wide range of applications, this solution is ideal for communicating accurate temperature measurements to panel mount displays, PLC's or data acquisition systems.

How to Order (Example: Part Number: **NTS - J - 03 - B - 0200 - Q00**)

Model

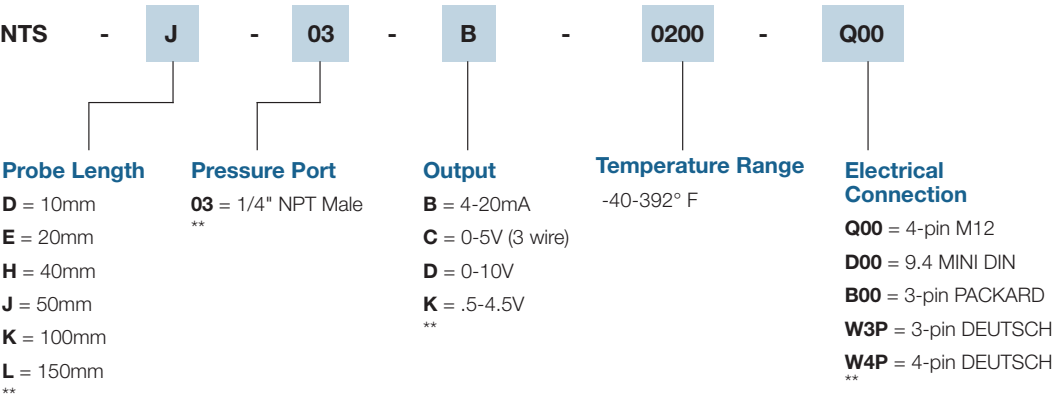

** Consult factory for further OEM options.

Specifications

Input

Supply Voltage / (Output): 8-28 VDC (0-5V, 4-20mA)
 5 VDC (0.5-4.5V)
 12-36 VDC (0-10V)

Performance


Accuracy: 1% FS
Stability: 0.2% FS
Measuring Temperature Range: -40 to 200° C (-40 to 392° F)
Operating Temperature Range: -40 to 85° C (-40 to 185° F)
Max Continuous Temperature: 250° F
Current Consumption: 23mA for 4-20mA
 8mA for 0-5V
 11mA for 0-10V

Max Pressure for 6 mm Diameter Probe: 300 bar
Max Pressure for 8 mm Diameter Probe: 500 bar

Mechanical Configuration


Probe Lengths: 10mm, 20mm, 40mm, 50mm, 100mm, 150mm
Process Connection: ¼ NPT (standard) *
Electrical Connection: 4-pin M12 *
Ingress Rating: IP67 with standard M12 cable
Housing: 304 stainless steel
Wetted Parts: 316SS

For best performance, use shielded cables. Mating cable assemblies sold separately. * Consult factory for further OEM options.

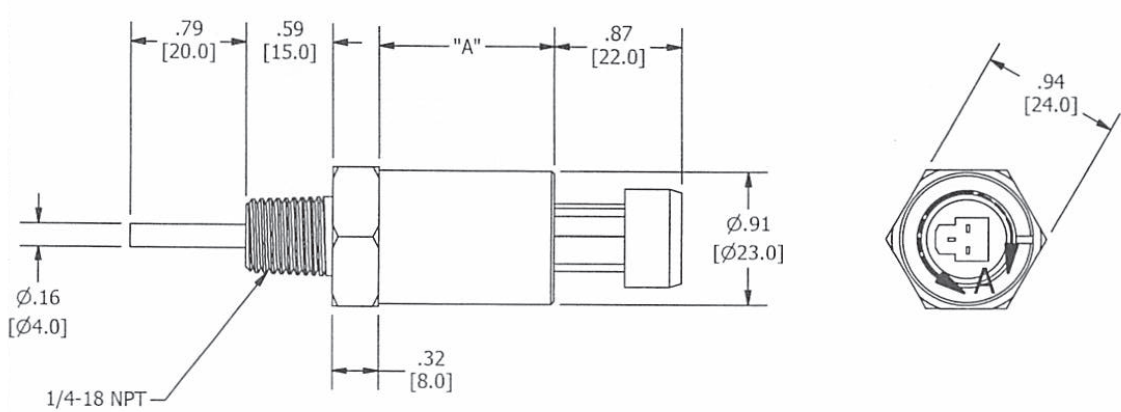


Electrical Connections

Output	Signal	Function	Pin
K	0.5-4.5V	Com	A
C	0-5V	Supply V +	B
D	0-10V	Output +	C
B	4-20mA	Output	A
		Supply V +	B




NOTES: 1. "A" dimension = 1.20 [30.5] when temp rating is less than 200°F.
2. "A" dimension = 1.70 [43.2] when temp rating is greater than 200°F.

W3P Connector



ELECTRICAL CONNECTIONS		
SIGNAL	FUNCTION	PIN
0-5V	SUPPLY V	A
	OUTPUT +	B
	COM	C
4-20mA	SUPPLY V	A
	N/C	B
	OUTPUT +	C

W4P Connector




ELECTRICAL CONNECTIONS		
SIGNAL	FUNCTION	PIN
0-5V	COM	1
	SUPPLY V+	2
	N/C	3
	OUTPUT +	4
4-20mA	OUTPUT +	1
	SUPPLY +	2
	N/C	3
	N/C	4

3 PIN Packard Connector for B00 Option




ELECTRICAL CONNECTIONS		
SIGNAL	FUNCTION	PIN
0-5V	COM	A
	SUPPLY +	B
	OUTPUT +	C
4-20mA	OUTPUT	A
	SUPPLY +	B

M12 4 PIN Connector for Q00 Option




ELECTRICAL CONNECTIONS		
SIGNAL	FUNCTION	PIN
0-5V	SUPPLY V+	1
	OUTPUT	2
	COM	3
	N/C	4
4-20mA	SUPPLY V+	1
	N/C	2
	OUTPUT	3
	N/C	4


0-5VDC OUTPUT



4-20mA OUTPUT




9.4 DIN Connector for D00 Option




ELECTRICAL CONNECTIONS			
SIGNAL	FUNCTION	COLOR	PIN
0-5V	+POWER SUPPLY	RED	1
	-COMMON	BLACK	2
	OUTPUT	WHITE	3
	*DIGITAL OUTPUT	GREEN	4
4-20mA	+POWER SUPPLY	RED	1
	OUTPUT	BLACK	2
	N/C	N/C	3
	N/C	N/C	4

*(OPTIONAL)


0-5VDC OUTPUT



4-20mA OUTPUT
N/C

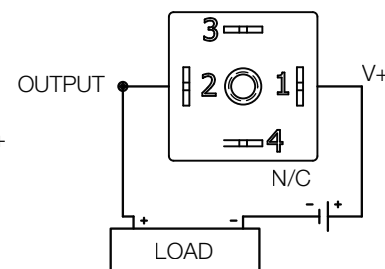


9.4mm DIN Cable Assembly

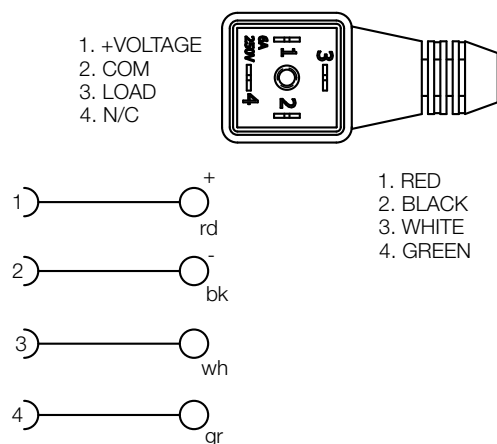

PART #	* = LENGTH
NTC91	1 METER
NTC93	3 METERS

CABLE: PUR - 4 X 22AWG SHIELDED


M12, 5 PIN IP67K Cable Assembly

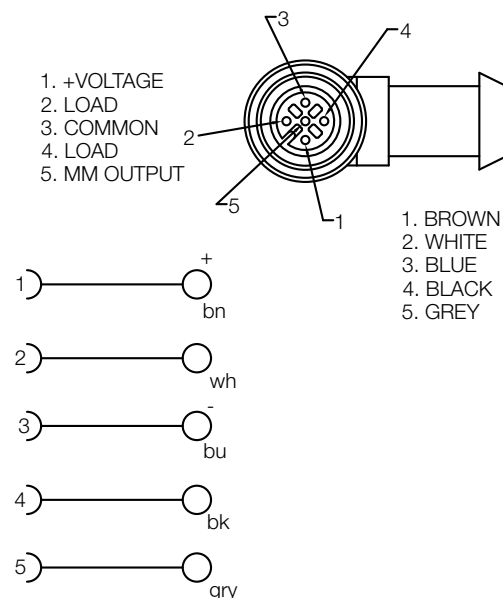

PART #	* = LENGTH
NTCM1251	1 METER
NTCM1253	3 METERS

CABLE: PVC - 5 X 22AWG SHIELDED


3 PIN Packard Cable Assembly

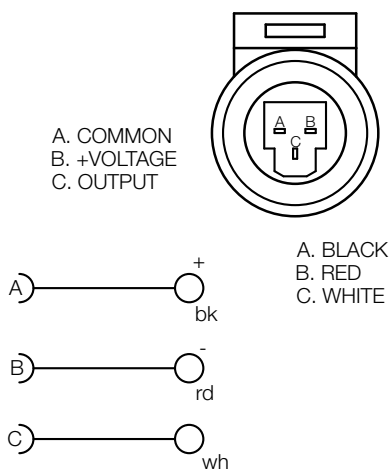

PART #	* = LENGTH
NTCPAC1	1 METER
NTCPAC3	3 METERS

CABLE: PVC - 4 X 22AWG

M12, 4 PIN IP69K Cable Assembly

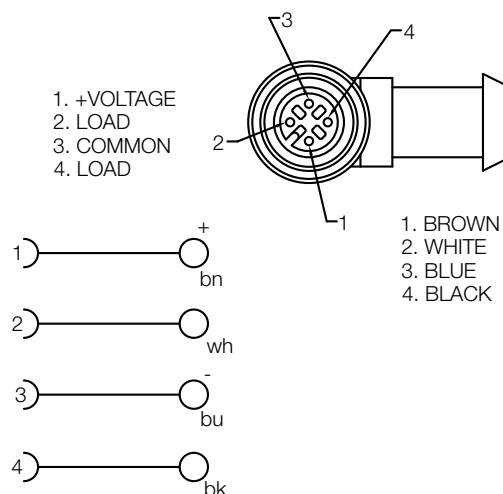

PART #	* = LENGTH
NTCM121	1 METER
NTCM123	3 METER

CABLE: PUR - 4 X 22AWG SHIELDED

Diaphragm Compatibility

Media	Buna	EP	Viton
Acetic Acid		•	
Acetone		•	
Acetylene	•		
Air	•		
Alcohols	•		
Alkalies (Weak)	•		
Alkalies (Strong)		•	
Ammonia (Anhydrous)	•		
Ammonia (Hydroxide)		•	
Asphalt			•
Automotive Oils	•		
Beer	•		
Benzene			•
Boric Acid	•		
Brake Fluid		•	
Bunker Oil	•		
Butane	•		
Butyl Cellosolve		•	
Carbon Dioxide	•		
Carbon Monoxide	•		
Cellube		•	
Chlorobenzene			•
Citric Acid	•		
Coke Oven Gas			•
Coolanol	•		
Diesel Fuels	•		
Di-Ester Lube (MIL-L-7808)			•
Dowtherm A&E		•	
Ethanol	•		
Ether		•	
Ethylene	•		
Ethylene Glycol	•		
Freon 11, 12, 112, 114	•		
Freon 22		•	
Fyrquel		•	
Fuel Oil	•		
Gasoline	•		
Glycerin	•		
Helium	•		
Hexane	•		

Media	Buna	EP	Viton
Hydraulic Oil (PET Base)	•		
Hydrocarbons	•		
Hydrogen	•		
Hydrogen Sulphide		•	
Isopropanol		•	
JP-3-6	•		
Kerosene	•		
LPG	•		
Lube Oil (PET base)	•		
Methanol	•		
MEK		•	
Mineral Oil	•		
Motor Oils	•		
Naptha		•	
Natural Gas	•		
Nitric Acid		•	
Nitrogen	•		
Oleum Spirits			•
Oxygen	•		
Ozone		•	
Crude Oil	•		
Phosphoric Acid			•
Propane	•		
Propanol	•		
Pydraul		•	
Shell Iris 902	•		
Silicone Greases	•		
Silicone Oils	•		
Skydrol 500 & 7000		•	
Soap Solutions	•		
Steam Below 320°F		•	
Stoddard Solvent	•		
Sulfuric Acid			•
Tolulene			•
Transmission Fluid A	•		
Trisodium Phosphate	•		
Turpentine	•	•	
Water to 220°F (104°C)	•		
Water to 302°F (150°C)		•	

Other diaphragm materials are available. Consult factory for stock.

Temperature Conversions - [Formula °C = 5/9 (°F - 32°) °F = (9/5 °C) +32°]

°C	°F	°C	°F	°C	°F	°C	°F	°C	°F
40	104.0	62	143.6	84	183.2	106	222.8	128	262.4
41	105.8	63	145.4	85	185.0	107	224.6	129	264.2
42	107.6	64	147.2	86	186.8	108	226.4	130	266.0
43	109.4	65	149.0	87	188.6	109	228.2	131	267.8
44	111.2	66	150.8	88	190.4	110	230.0	132	269.6
45	113.0	67	152.6	89	192.2	111	231.8	133	271.4
46	114.8	68	154.4	90	194.0	112	233.6	134	273.2
47	116.6	69	156.2	91	195.8	113	235.4	135	275.0
48	118.4	70	158.0	92	197.6	114	237.2	136	276.8
49	120.2	71	159.8	93	199.4	115	239.0	137	278.6
50	122.0	72	161.6	94	201.2	116	240.8	138	280.4
51	123.8	73	163.4	95	203.0	117	242.6	139	282.2
52	125.6	74	165.2	96	204.8	118	244.4	140	284.0
53	127.4	75	167.0	97	206.6	119	246.2	141	285.8
54	129.2	76	168.8	98	208.4	120	248.0	142	287.6
55	131.0	77	170.6	99	210.2	121	249.8	143	289.4
56	132.8	78	172.4	100	212.0	122	251.6	144	291.2
57	134.6	79	174.2	101	213.8	123	253.4	145	293.0
58	136.4	80	176.0	102	215.6	124	255.2	146	294.8
59	138.2	81	177.8	103	217.4	125	257.0	147	296.6
60	140.0	82	179.6	104	219.2	126	258.8	148	298.4
61	141.8	83	181.4	105	221.0	127	260.6	149	300.2

Pressure Conversion Formulas

Into > Multiply by To Convert	PSI	H2O (15°C)	mmHg (0°C)	"Hg (0°C)	Millibar	Bar	Kg/Cm2	kPa
PSI	•	27.70	51.71	2.036	68.95	0.06895	0.07031	6.895
"H2O (15°C)	0.03609	•	1.867	0.07349	2.489	0.002489	0.002538	0.249
mmHg (0°C)	0.01934	0.5357	•	0.03937	1.3333	0.0013333	0.0013596	0.113
"Hg (0°C)	0.4912	13.61	25.40	•	33.86	0.03386	0.03453	3.386
Millibar	0.0145	0.4018	0.750062	0.02953	•	0.001	0.0010197	0.09998
Bar	14.50	401.8	750.062	29.53	1000	•	1.0197	99.98
Kg/Cm2	14.22	394.05	735.559	28.96	980.7	0.9807	•	98.05
kPa	0.145	4.016	7.519	0.2953	10.002	0.010	0.0102	•

Glossary of Terms

Snap-Action Switches

Nason uses only the highest quality snap-action electrical switches which insure a positive, instantaneous electrical contact under all operating conditions. Nason electrical switches are UL, CSA, CE, and military listed. Ask about our new environmentally sealed snap-action switch.

Diaphragms

Nason pressure switches incorporate elastomer diaphragms to provide a positive media seal. Nitrile is the material of choice for most applications. Ethylene propylene, fluorocarbon, fluorosilicon, and neoprene are readily available for specific applications.

Differential

A distinct change in pressure (or temperature for temperature switches) is necessary to reset a Nason snap-action switch to its original electrical state. This feature prevents “searching” and maximizes switch and system life. Catalog ranges are typical mid-range and can be varied with special construction.

Electrical Connections

A wide variety of electrical connectors are readily available for most applications. Screw terminals, wire leads, blades, studs, conduit, automotive DIN and military connectors are stock items.

Media Connections

Nason’s offering of media connections is unmatched in the industry. NPT, BSP, SAE, JIS, DIN, MS and many others are readily available.

Electrical Circuits

A unique variety of electrical contact arrangements allows the system designer to achieve complex logic at minimal cost. Contact arrangements up to form ZZ and isolated dual set points are available.

Electrical Rating

Most Nason switches are available in a nominal 5 or 10 AMP rating. Gold plated contacts for low current and 25 AMP ratings are also available.

Life

The operational life of a Nason switch is normally in excess of one million cycles. Operating life depends on many variables, and specific tests should be run if marginal conditions exist.

Application

Nason switches are used successfully in a great variety of pneumatic and hydraulic applications. Military vehicles and equipment, aviation, marine, machine tools, farm and construction equipment, process equipment, medical equipment, and industrial machinery are typical applications.

Customization


Nason has the experience and willingness to customize any switch to meet specific application requirements. Special media connections, electrical connections, circuitry and construction materials can be designed and produced as needed.

Installation Torques


Pressure Switch - 10 ft lbs
Temperature Switch - 14-15 ft lbs.

Circuitry

Adjustable Pressure Switch
Component Symbol



Fixed Pressure Switch
Component Symbol





CHECK OUT
nasonptc.com/configure
to create your own custom CAD file

WARRANTY:


It is the sole responsibility of the user to determine the suitability of any product or information supplied by Nason for any application or use by the user.

ALL ORDERS FOR PRODUCT ARE SUBJECT TO THE FOLLOWING: Nason warrants each product to be free from defects in material and workmanship under normal use and service. Nason's obligation under this warranty is limited to repairing or supplying, at our option, a part or parts to replace any defective part or parts which fail, within one (1) year from date of shipment. No product shall be returned without prior authorization. If authorized, the transportation charges shall be prepaid to Nason, Walhalla, South Carolina. Unauthorized returns will not be accepted.

The provisions of this warranty shall not apply to any part or parts which have been subject to misuse, negligence or accident, or which have been repaired or altered in any way so as in the judgment of Nason to affect adversely its performance, stability or reliability.

Nason neither assumes nor authorizes anyone to assume for it any other obligation or liability for any loss or damage, either direct, incidental or consequential, resulting from or arising out of or in connection with any of its defective part or parts.

THIS WARRANTY IS EXPRESSLY IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND OF ANY OTHER OBLIGATION OR LIABILITY ON THE PART OF NASON OF ANY NATURE WHATSOEVER.



For Nason's catalog of pneumatic and hydraulic automation products call toll-free 800.229.4955 or visit our website at www.nasonptc.com

1307 S Highway 11 • Walhalla SC 29691
800.229.4955 • Phone: 864.638.9521
Fax: 864.638.7903 • Orders: 800.229.4955
www.nasonptc.com