


4.0 DIMENSIONS (CONTINUED)

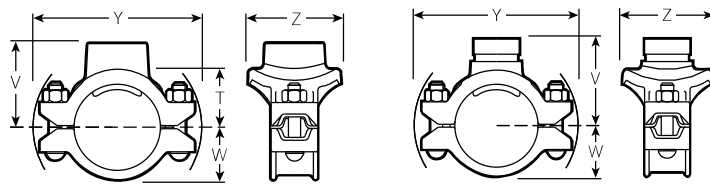

FEMALE THREADED OUTLET

GROOVED OUTLET

Size Run & Outlet			Style No.	Dimensions							Weight																																																														
Nominal inches DN		Actual Outside Diameter inches mm		920 or 920N	T ¹ inches mm	V ^{3,4} Thd. inches mm	V ⁴ Grv. inches mm	W inches mm	Y inches mm	Z inches mm	Female Thd. Approx. (Each) Lbs. kg	Grv. Approx. (Each) Lbs. kg																																																													
3 DN80	×	1/2 DN15	×	0.840 21.3	920N	2.52 64	3.05 77	—	2.28 58	6.15 156	2.75 70	3.4 1.5	—																																																												
														1.050 26.9	920N	2.49 63	3.05 77	—	2.28 58	6.15 156	2.75 70	3.4 1.5	—																																																		
																								1.315 33.7	920N	2.38 60	3.06 78	—	2.28 58	6.15 156	2.75 70	3.3 1.5	—																																								
																																		1.660 42.4	920N	2.55 65	3.25 83	3.56 90	2.28 58	6.15 156	3.00 76	3.8 1.7	3.7 1.7																														
																																												1.900 48.3	920N	2.78 71	3.50 89	3.56 90	2.28 58	6.15 156	3.25 83	4.1 1.9	3.8 1.7																				
																																																						2.375 60.3	920N	2.75 70	3.50 89	3.56 90	2.28 58	6.75 171	3.88 99	4.9 2.2	4.6 2.1										
																																																																4.000 101.6	920N	—	—	3.75 95	2.44 62	6.72 171	3.88 99	—	3.8 1.7
1.050 26.9	920N	3.00 76	3.56 90	—	2.69 68	7.01 178	2.75 70	3.7 1.7	—																																																																
										1.315 33.7	920N	2.88 73	3.56 90	—	2.69 68	7.01 178	2.75 70	3.6 1.6	—																																																						
																				1.660 42.4	920N	3.08 78	3.78 96	4.00 102	2.69 68	7.01 178	3.00 76	4.0 1.8	3.6 1.6																																												
																														1.900 48.3	920N	3.28 83	4.00 102	4.00 102	2.69 68	7.01 178	3.25 83	4.2 1.9	3.9 1.8																																		
																																								2.375 60.3	920N	3.25 83	4.00 102	4.00 102	2.69 68	7.01 178	3.88 99	5.0 2.3	4.6 2.1																								
																																																		2.875 73.0	920	2.88 73	4.00 102	4.00 102	2.69 68	7.34 186	4.63 118	5.8 2.6	5.0 2.3														
																																																												3.000 76.1	920	2.88 73	4.00 102	4.00 102	2.69 68	7.34 186	4.63 118	5.8 2.6	6.4 2.9				
																																																																						3.500 88.9	920	3.31 84	4.50 114

¹ Center of run to engaged pipe end, female threaded outlet only (dimensions approximate).

² Available with grooved or female threaded outlet. Specify choice on order.

³ British Standard female pipe threaded outlet is available as listed. Specify "ISO 7-Rc" clearly on order.

⁴ Center of run to end of fitting.

⁵ For 76.1 mm threaded outlet, specify 2 1/2" ISO 7-Rc clearly on order.

NOTE:

- Always reference [publication I-100](#), Victaulic Field Installation Handbook, for complete pipe preparation, hole size, and installation requirements.