

Timer type 726 008 050




120 minute, 20 mm shaft, two sets of horizontal contacts, with bell, with "hold", mounted with two screws 2,9 x 8 mm.

Applications: *Battery chargers, ultrasonic cleaners, saunas, tanning beds, medical equipment, dryers, small appliances, and food service equipment.


Standard Features: * max 16 A (active power) and 3 A (for reactive (inductive) power) – 240 V
 * max 10 A (active power) 2 A (for reactive (inductive) power) – 400 V
 * 1/4 HP 120/250 Vac 60Hz
 * 15A 1000 WT

Certificates: * VDE, ENEC, CSA, UL



MOUNTING FOR TIMER




TYPE OF COVER




TURNING ANGLE



TYPE OF SWITCH

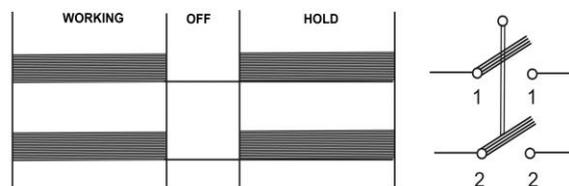

SHAPE OF SHAFT



POSITION "0"

