
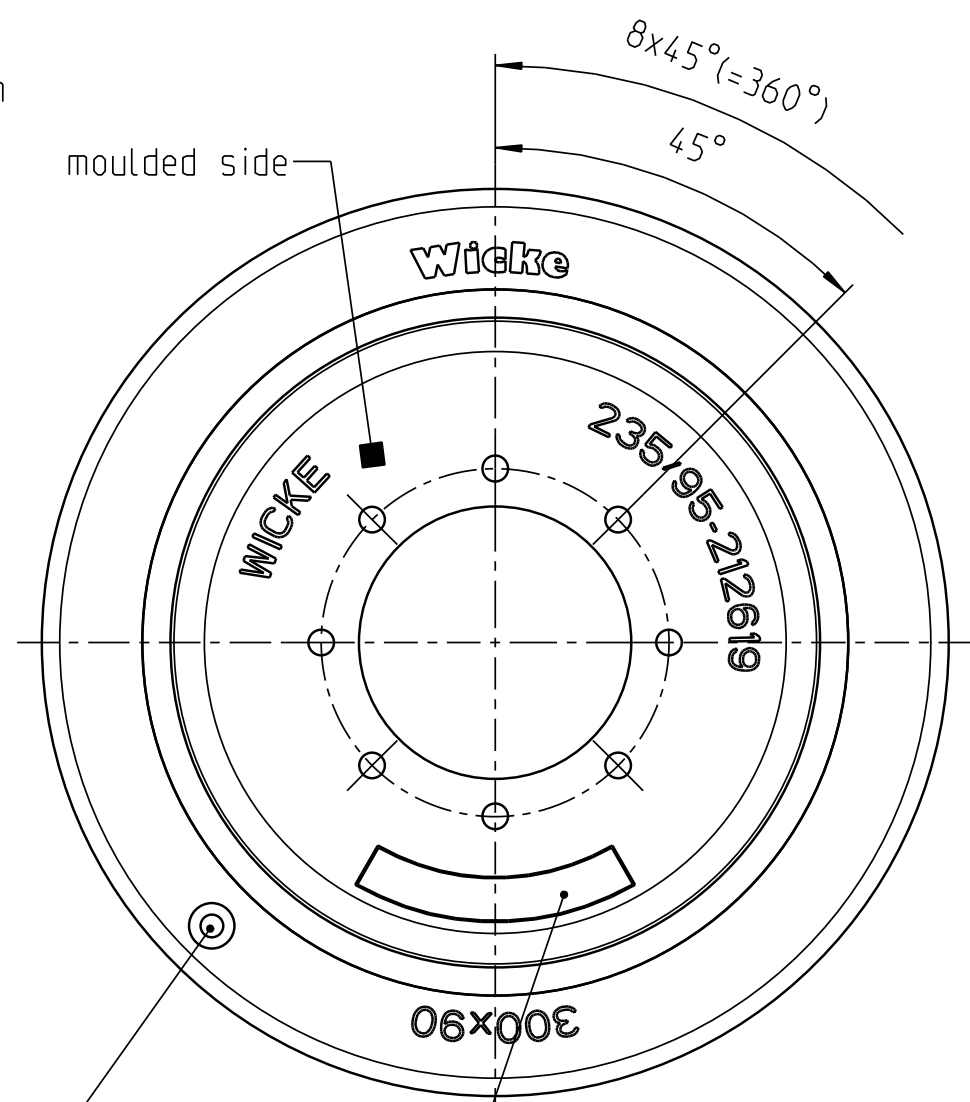
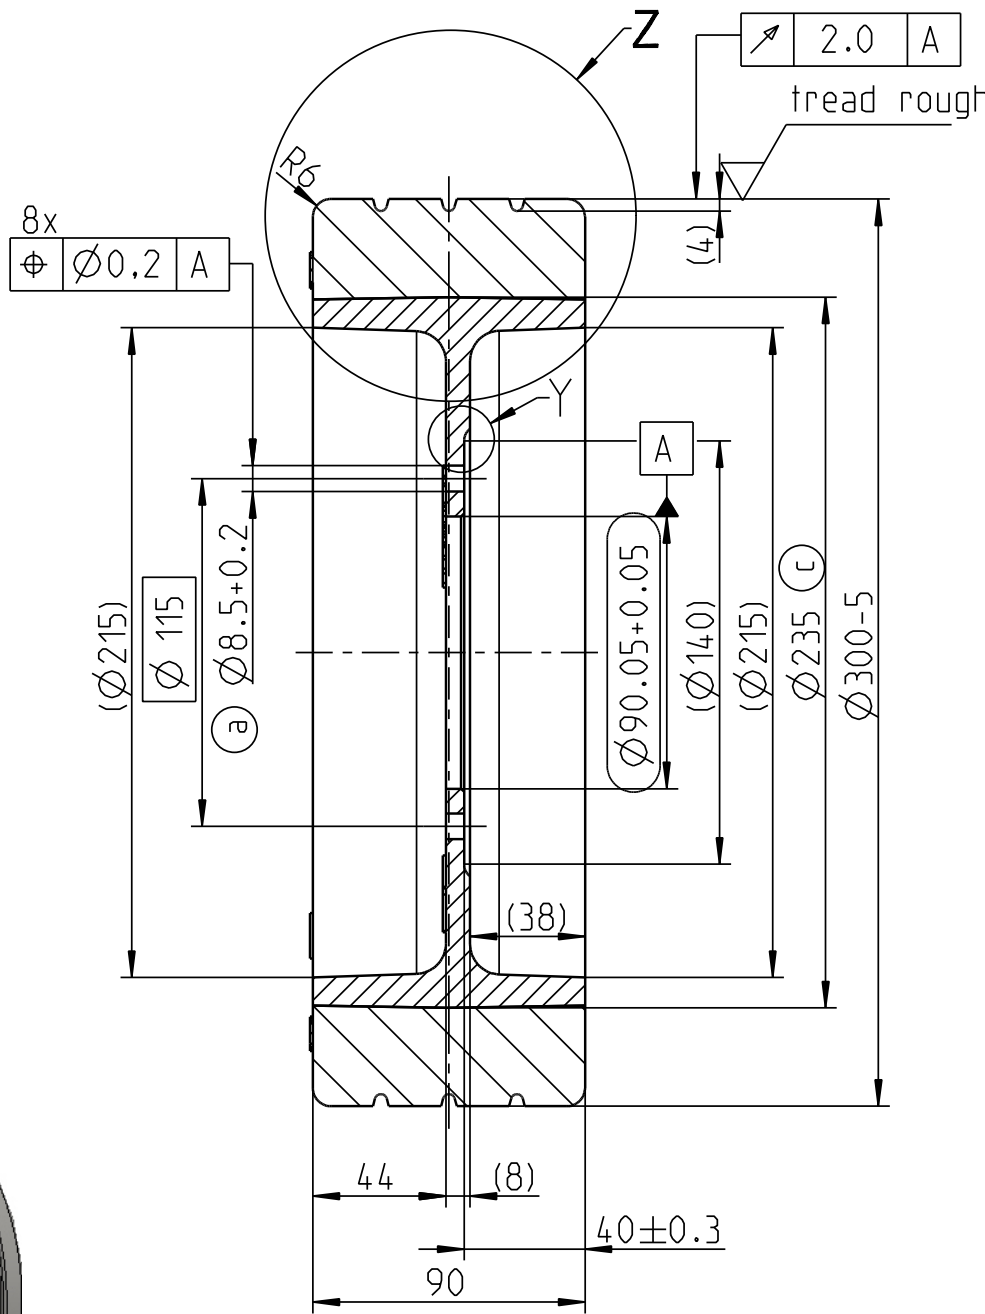
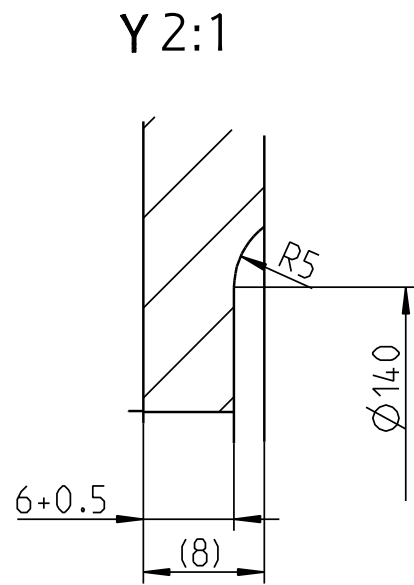


Creo 4.0

Notice of protected right ISO 16016

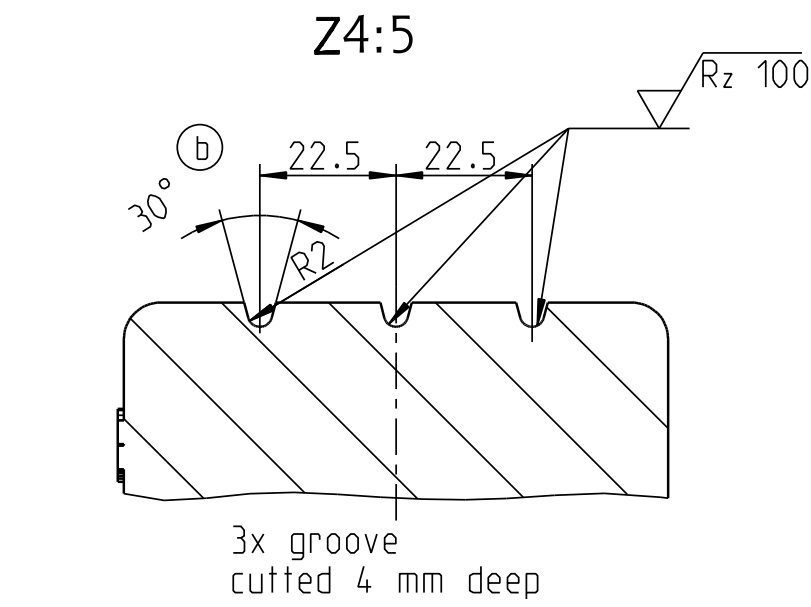

date of production:
week/year

area for inscription:
1. identity number of the producer
2. productions charge
3. mould number

Please note

copy of drawing is scaled down


Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

WICKE GmbH + Co.
Elberfelder Strasse 109
D-45549 Sprockhoevel-Herkamp

✓ KTL-painted
RAL 9005 Jet black
thickness: 20±5 µm

(Rz 100)

OEM		
speed	load capacity	
	drive, swivel and brake wheels	free running load wheels
6 km/h	1050 kg	kg
10 km/h	850 kg	kg
16 km/h	730 kg	kg

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.				accept. tolerances ISO 2768-vL EN ISO 8015 EN ISO 1101		surface EN ISO 1302	scale 2:5		weight 9.561 kg			
							Material tyre: Greythane® 75 Shore A rim: EN-GJL-HB215					
ISO 2768 very coarse					date	signatures	title				Unit:	
nominal dim.		tolerance			drawn by	30.08.10	Marek	wheel SUG 300/ 90/FL-S				D <input checked="" type="checkbox"/> C <input type="checkbox"/>
0.5 to 3		-			checked	30.08.10	Lange					
3 to 6		±0.5			standard	07.09.10	Pfl öging					
6 to 30		±1.0			change checked	17.02.20		drawing number 212615				sheet 2/2 A3
30 to 120		±1.5		c	Ø230 to Ø235	17.02.20	Korte					
120 to 400		±2.5		b	30° added	13.01.11	Marek					
400 to 1000		±4.0		a	Ø10.5 to Ø8.5	24.09.10	Marek					
		rev.		description		date	sign.	repl. for:				replaced by: