
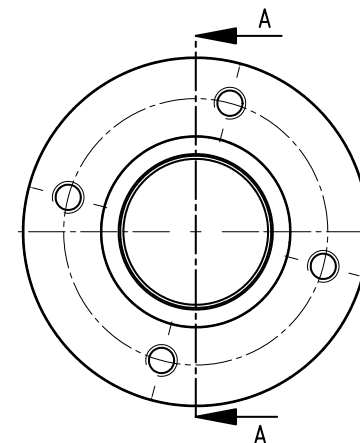




$$\begin{aligned} T_{KN} &= 60 \text{ Nm} \\ T_{Kmax} &= 120 \text{ Nm} \end{aligned}$$

Schraubenanzugsmoment (1.3) $T_A = 8.5 \text{ Nm}$
 screw tightening torque (1.3) $T_A = 8.5 \text{ Nm}$

Reibschlussmoment	Ø24H6/k6	T _R =134 Nm
transmittable friction torque	Ø24H6/h6	T _R =101 Nm

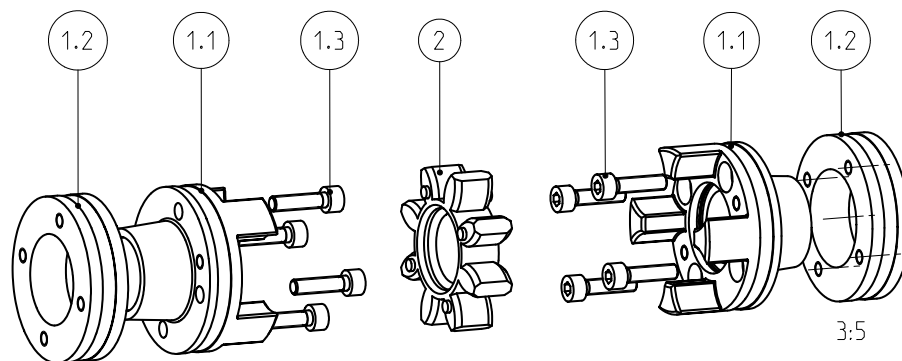

				Schutzvermerk ISO 16016 beachten Note protection mark acc. to ISO 16016				
				Massstab Scale		5:4	Format Size	A3
ROTEX GS P 24 Coupling with Clamping Ring Hub				ROTEX GS P 24 Kupplung mit Spannringnabe				
	gezeichnet drawn	Werkstoff Material		Kz	Lfd.-Nr. Current number	Index Rev.		
Datum Date	03.02.25	Norm Standard		M	932484	0		
Name	SLO	Gewicht Weight	0.879 kg					