
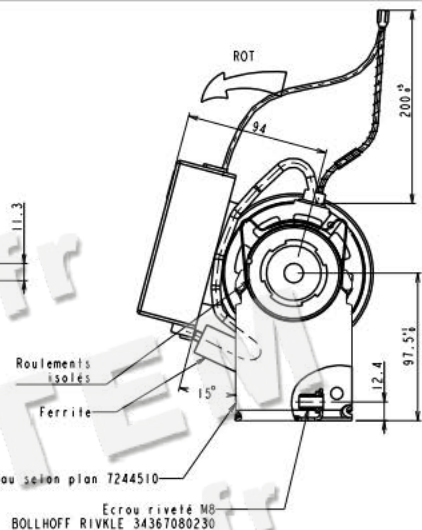
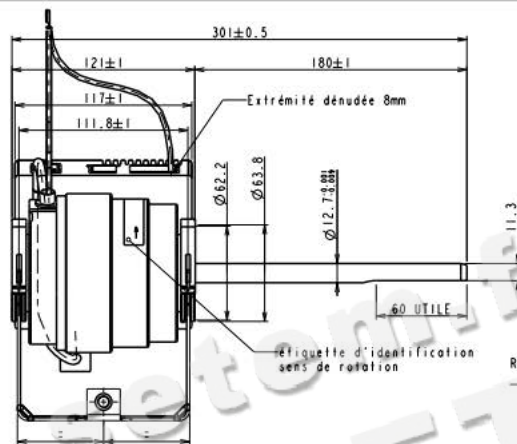
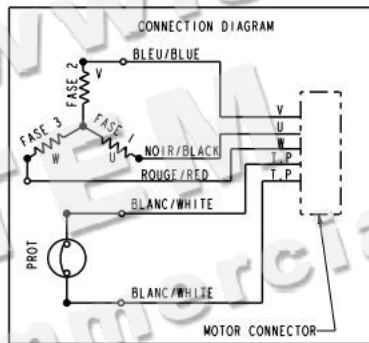


Cosse Faston femelle 6.35mm
Deverrouillable
de type "RSB 7961 F 6,3 - 2,5"

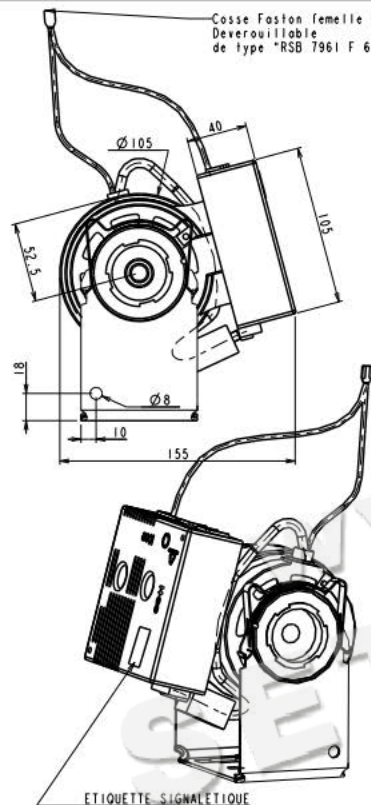

LS MS HS	220 A 1500	475/200/935
VITESSE	PLAGE	VALEUR PAR DEFAUT

03479018600 P35810 P0186		230	50/60	120° ±7°C	B	20kHz
MODEL	CUSTOMER CODE	VOLT	Hz	THERM. PROT.	INS. CL.	FREQ.

NOTA : MONTAGE SUR ROULEMENTS A BILLES ISOLÉS
PLOT ANTIVIBRATI DJURETE 3R SHORE


ETIQUETTE SIGNALÉTIQUE

Labels on the label:

- Voltage
- Frequency
- Batch nr.
- Power
- CIAT p/m
- SISME p/m
- Software Version
- Hardware p/m

"remote box" connector
(manual speed
set-up variation)

RS 232 connector
(speed set-up variation)
(use only a specific interface
to connect the PC)

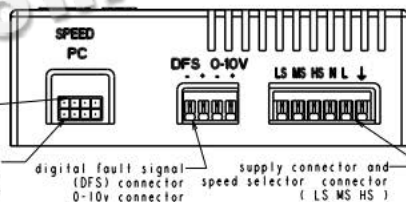

digital fault signal
(DFS) connector
0-10V connector

supply connector and
speed selector connector
(LS MS HS)