



Sample gas probe GAS 222.35U Ex2

In many applications gas analysis is the key for safe and efficient control of process flows, environmental protection and quality assurance. In extractive gas analysis the location of the gas sampling point is crucial for the reproducibility and accuracy of the analysis results.

The specific filter capacity, corrosion resistance and functional equipment requirements for the probe arise from the composition of the sample gas.

However, operating costs are also an important criterion in the selection, as the sampling points are frequently located at hard to access points in the system. Effective particle filter backwashing options and low maintenance characterise the extensive GAS probe series.

Versions with Atex and IECEx approval

Unheated probe with upstream filter


The filter element can easily be removed by turning the handle 90°

For dust loads up to 200 g/m³, non-condensable gases

The probe is permitted for use in explosive areas



Flow chart

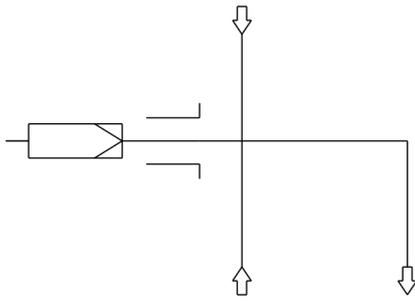

Technical Data

Gas Probe Technical Data

Ambient temperature without accessories:	-20 to +80 °C	
Ambient temperature for accessories:	Component	Ambient temperature range
	Valve for pressurized air:	-30 °C < T _{amb} < +55 °C
	Junction box:	-20 °C < T _{amb} < +70 °C
Max. gas inlet temperature:	+195 °C (T3)/+130 °C (T4)	
Medium temperature (blowback):	Component	Medium temperature range
	Valve for pressurized air:	-10 °C to +80 °C
Max. operating pressure	6 bar	
Material:	1.4571	
Parts in contact with media:	Seals: Graphite/1.4404 and see filter	
Markings:	ATEX:  II 3G Ex ec mb IIC T3/T4 Gc IECEX: Ex ec mb IIC T3/T4 Gc	

Ordering instructions

The item number is a code for the configuration of your unit. Please use the following model key:

4622235	X	X	X	X	X	X	0	0	X	X	X	0	0	0	Product characteristics
															Junction box
															0 No
															1 Yes
															Flange
															0 1 Flange DN65 PN6
															0 2 Flange DN3"-150
															Hazardous area Outside and Inside
															2 9 Ex-Zone 2 outside, none inside
															2 2 Ex-Zone 2 outside and inside
															Temperature class
															3 T3
															4 T4
															Power supply sample probe
															0 none
															Calibration gas port
															0 No
															1 6 mm
															2 6 mm with check valve
															3 1/4"
															4 1/4" with check valve
															Capacitive vessel *
															0 No
															1 Yes
															Valve for pressurized air *
															0 Ball valve
															1 Solenoid valve 110 V (marked with "mb")
															2 Solenoid valve 230 V (marked with "mb")
															3 Solenoid valve 24 V (marked with "mb")
															9 none


* Blowback of explosive atmosphere prohibited.

Options

The base unit becomes functional by adding accessories suitable for the application. Please refer to accessory data sheet no. 461099 for information.

Please also refer to data sheet no. 461000 "GAS 222 Gas Probes" for a general description.

Dimensions

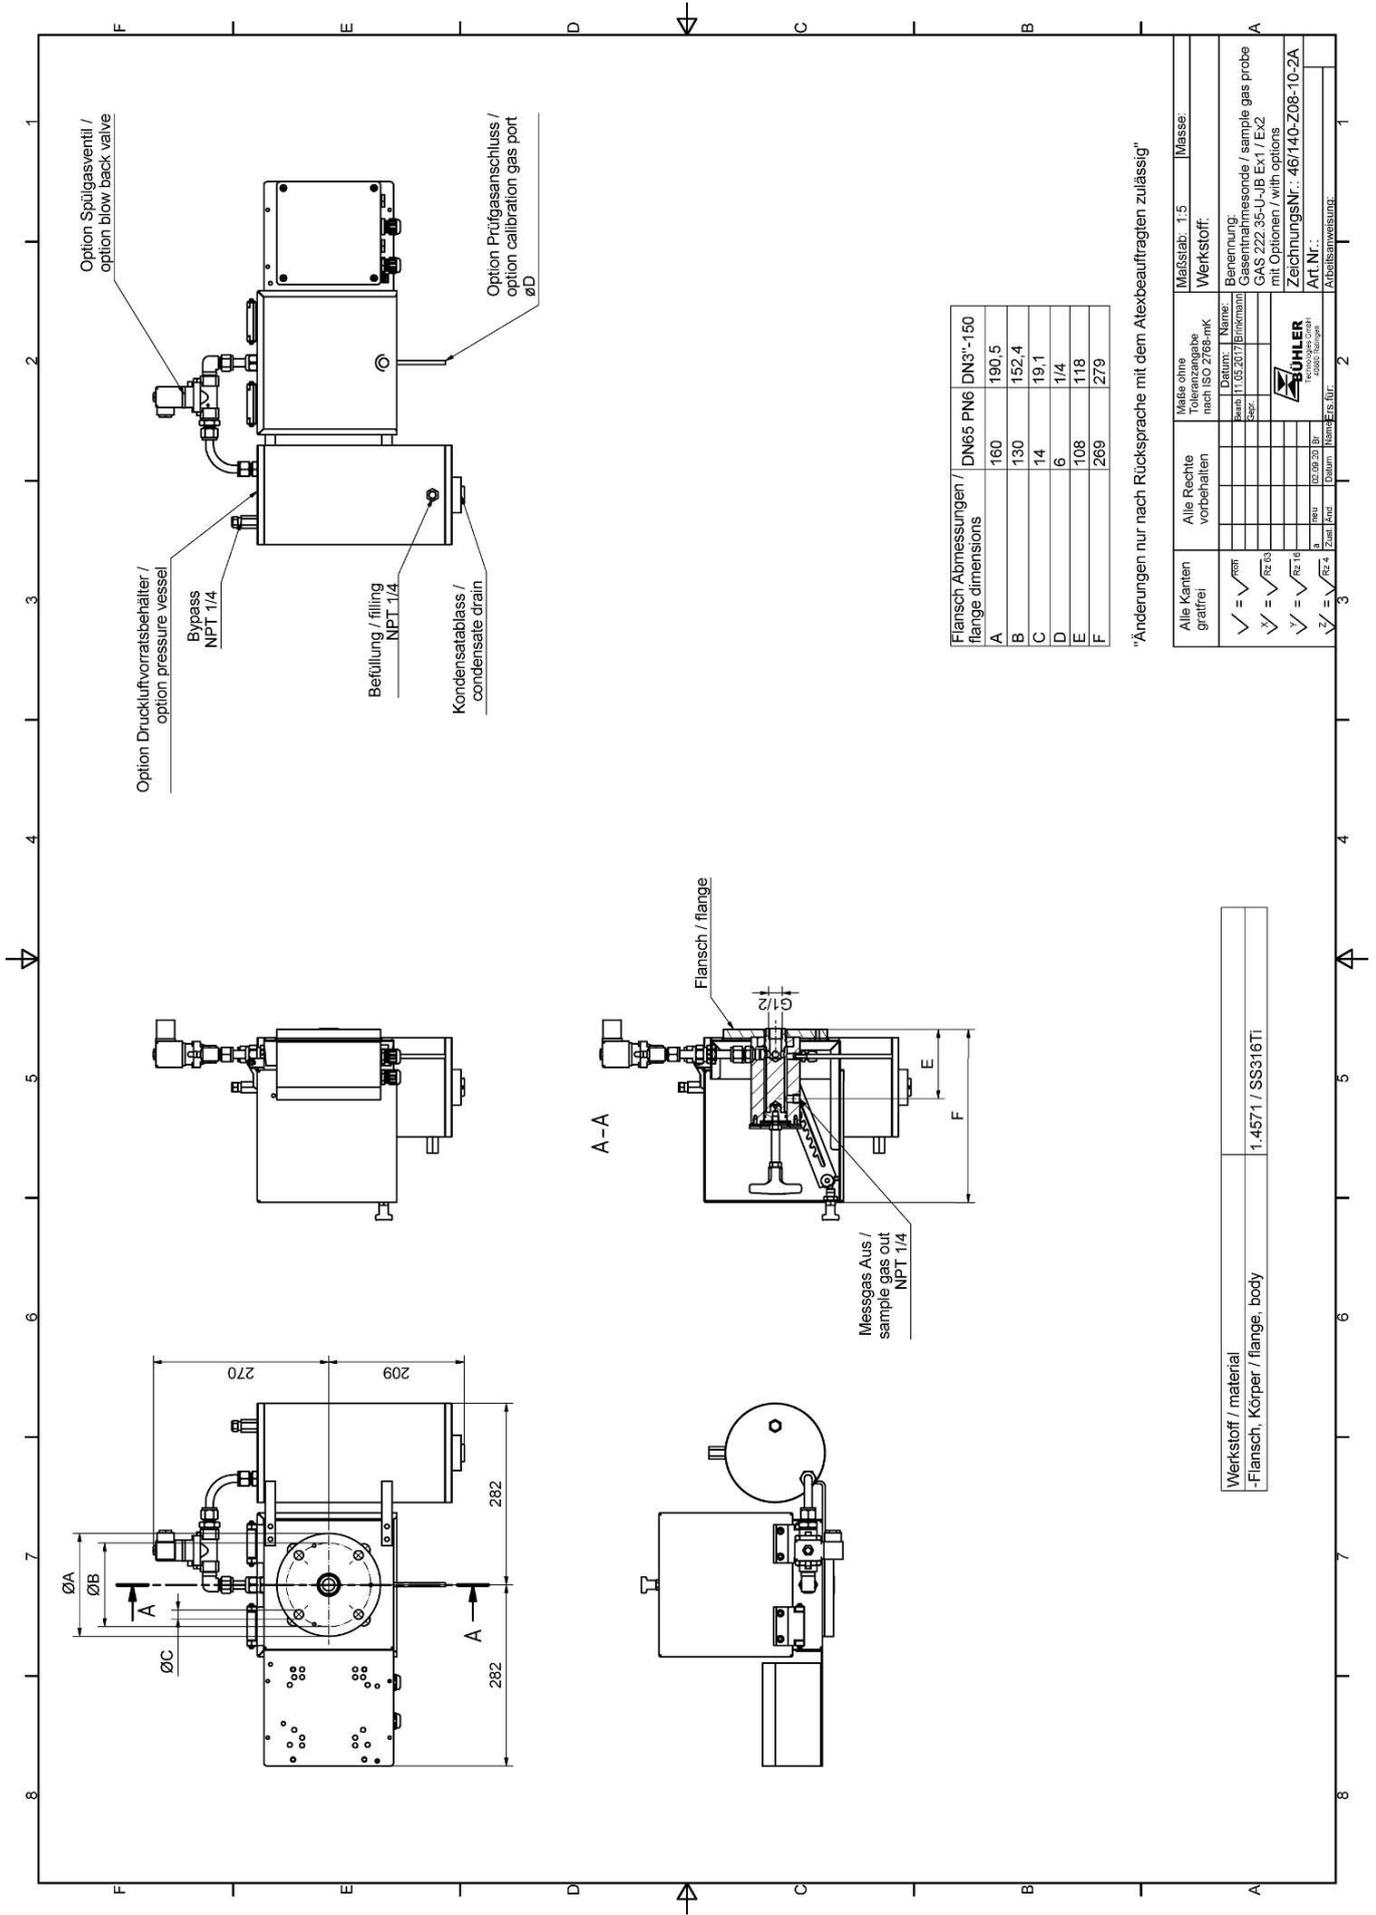

"Änderungen nur nach Rücksprache mit dem Alexbeauftragten zulässig"

Alle Kanten gratfrei	Alle Rechte vorbehalten	Maße ohne Toleranzangabe nach ISO 2768-mK	Maßstab: 1:5	Masse:
$\checkmark = \sqrt{r_{min}}$		Name:	Werkstoff:	
$\checkmark = \sqrt{r_{ze, 0.5}}$		Datum:		
$\checkmark = \sqrt{r_{ze, 1.6}}$		Benennung:		
$\checkmark = \sqrt{r_{ze, 4}}$		Gasentnahmesonde / sample gas probe		
		GAS 222.35-U-IB Ex1 / Ex2		
		mit Optionen / with options		
		ZeichnungsNr.: 46/140-Z08-10-2A		
		ART.Nr.:		
		Abwärtsweisung:		

Werkstoff / material
-Flansch, Körper / flange, body
1.4571 / SS316Ti