

Slider Type

Mini

Standard

Controllers Integrated

Rod Type

Mini

Standard

Controllers Integrated

Table/Arm /Flat Type

Mini

Standard

Gripper/ Rotary Type

Linear Servo Type

Cleanroom Type

Splash-Proof

Controllers

PMEC /AMEC

PSEP /ASEP

ROBO NET

ERC2

PCON

ACON

SCON

PSEL

XSEL

Pulse Motor

Servo Motor (24V)

Linear Servo Motor

RCP2-RTB/RTBL

ROBO Cylinder Rotary Medium Vertical Type 50mm Width Pulse Motor

■ Configuration:	RCP2	<input type="checkbox"/>	I	28P	<input type="checkbox"/>							
Series	Type	Encoder	Motor	Deceleration Ratio	Oscillation Angle	Compatible Controllers	Cable Length	Option	N : None	P : 1m	S : 3m	NM : Reversed-rotation
RTB : 330-degree rotation	I: Incremental	28P : 28 □ size Pulse motor	20: 1/20 deceleration ratio	330: 330degrees (RTB only)	P1: PCON RPCON PSEL	N : None	P : 1m	S : 3m	M : 5m	X□□ : Custom	TA : Table adapter	SA : Shaft adapter
RTBL: Multi-rotational	* The Simple absolute encoder is also considered type "I".	30: 1/30 deceleration ratio	360: 360degrees (RTBL only)	P3: PMEC PSEP	R□□ : Robot cable							

* See page Pre-35 for an explanation of the naming convention.



Technical References



P. A-5



- (1) The output torque decreases as the rotational speed increases.
Check the output torque graph on the right to see whether the speed required for your desired motion is supported.
- (2) The allowable moment of inertia of the rotated work piece varies with the rotational speed.
Check the Allowable Moment of Inertia graph on the right to see if the moment of inertia required for your desired motion is within the allowable range.
- (3) The rated acceleration while moving is 0.3G.

■ Speed vs. Load Capacity

Due to the characteristics of the Pulse motor, the RCP2 series' load capacity decreases at high speeds. In the table below, check if your desired speed and load capacity are supported.

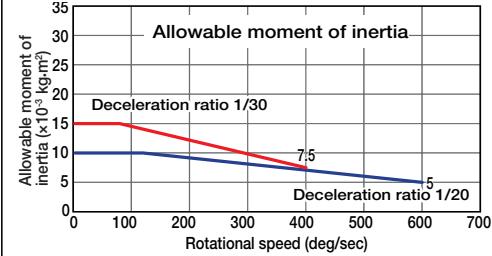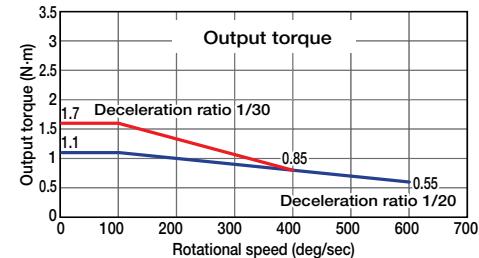

Actuator Specifications

■ Lead and Load Capacity

Model	Deceleration Ratio	Max. Torque (N·m)	Allowable Moment of Inertia ($\text{kg}\cdot\text{m}^2$)	Oscillation Angle (deg)
RCP2-RTB-I-28P-20-330-①-②-③	1/20	1.1	0.01	330
RCP2-RTB-I-28P-30-330-①-②-③		1.7	0.015	
RCP2-RTBL-I-28P-20-360-①-②-③	1/20	1.1	0.01	360
RCP2-RTBL-I-28P-30-360-①-②-③		1.7	0.015	

Legend: ① Compatible controller ② Cable length ③ Options

■ Deceleration Ratio and Max. Speed

Stroke Deceleration Ratio	330/360 (deg)
1/20	600
1/30	400

(Unit: degrees/s)

Stroke List

Type	Oscillation Angle (deg)	Standard Price
RTB	330	—
RTBL	360	—

② Cable List

Type	Cable Symbol	Standard Price
Standard Type	P (1m)	—
	S (3m)	—
	M (5m)	—
Special Lengths	X06 (6m) ~ X10 (10m)	—
	X11 (11m) ~ X15 (15m)	—
Robot Cable	X16 (16m) ~ X20 (20m)	—
	R01 (1m) ~ R03 (3m)	—
	R04 (4m) ~ R05 (5m)	—
	R06 (6m) ~ R10 (10m)	—
	R11 (11m) ~ R15 (15m)	—
	R16 (16m) ~ R20 (20m)	—

* See page A-39 for cables for maintenance.

③ Option List

Name	Option Code	See Page	Standard Price
Reversed-rotation (*)	NM	→ A-33	—
Shaft adapter	SA	→ A-35	—
Table adapter	TA	→ A-37	—

* Reversed-rotation option can be selected on the multi-rotational model only.

Actuator Specifications

Item	Description
Drive System	Hypoid gear
Positioning Repeatability	±0.01 degrees
Homing Accuracy	±0.01 degrees
Lost Motion	±0.1 degrees
Allowable Thrust Load	50N
Allowable Load Moment	3.9 N·m
Weight	0.86kg
Ambient Operating Temp./Humidity	0 ~ 40°C, 85% RH or less (non-condensing)

Dimensions

CAD drawings can be downloaded from IAI website. www.intelligentactuator.com








For Special Orders

P. A-9

Note:


- * In the drawing on the right, the shaded area indicates the rotating part.

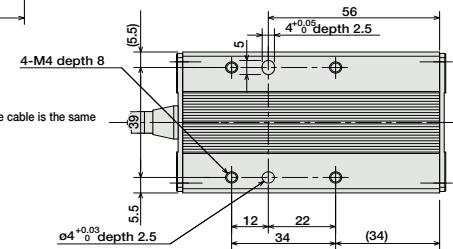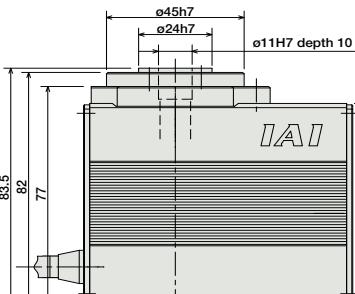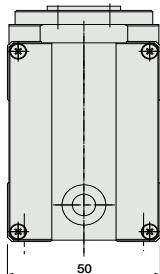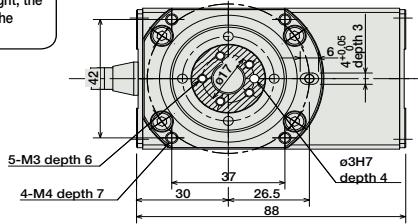

* The bend radius R of the cable is the same as other models.

Note:

- The position in the drawing on the left is the home position.
- When homing, the actuator rotates to the left past the home position by 1 degree. Therefore please watch for any interference with the surrounding objects.
- The range of motion is 330 degrees clockwise, as viewed from above.

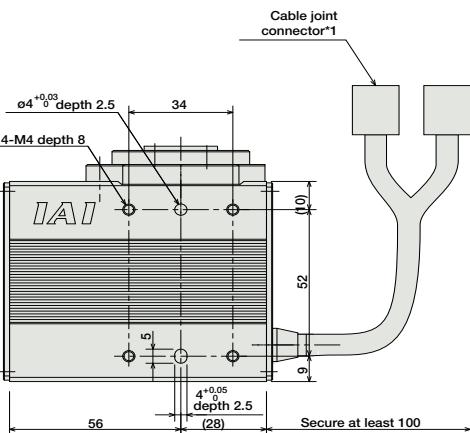

*1 The motor-encoder cable is connected here.
See page A-39 for details on cables.

Weight (kg)	0.86
-------------	------

① Compatible Controllers

The RCP2 series actuators can operate with the controllers below. Select the controller according to your usage.

Name	External View	Model	Description	Max. Positioning Points	Input Voltage	Power Supply Capacity	Standard Price	See Page				
Solenoid Valve Type		PMEC-C-28PI-NP-2-①	Easy-to-use controller, even for beginners	3 points	AC100V AC200V	See P481	-	→ P477				
		PSEP-C-28PI-NP-2-0	Operable with same signal as solenoid valve. Supports both single and double solenoid types. No homing necessary with simple absolute type.									
Splash-Proof Solenoid Valve Type		PSEP-CW-28PI-NP-2-0	→ P487									
Positioner Type		PCON-C-28PI-NP-2-0	Positioning is possible for up to 512 points	512 points	DC24V	2A max.	-	→ P525				
		PCON-CG-28PI-NP-2-0										
Pulse Train Input Type (Differential Line Driver)		PCON-PL-28PI-NP-2-0	Pulse train input type with differential line driver support	(-)								
		PCON-PO-28PI-NP-2-0										
Serial Communication Type		PCON-SE-28PI-N-0-0	Dedicated to serial communication	64 points								
Field Network Type		RPCON-28P	Dedicated to field network	768 points				→ P503				
Program Control Type		PSEL-C-1-28PI-NP-2-0	Programmed operation is possible Operation is possible on up to 2 axes	1500 points								

* This is for the single-axis PSEL.

* ① is a placeholder for the power supply voltage (1: 100V, 2: 100~240V).

Slider Type

Mini

Standard

Controllers Integrated

Rod Type

Mini

Standard

Controllers Integrated

Table/Arm /Flat Type

Mini

Standard

Gripper/ Rotary Type

Linear Servo Type

Cleanroom Type

Splash-Proof

Controllers

PMEC /AMEC

PSEP /ASEP

ROBO NET

ERC2

PCON

ACON

SCON

PSEL

ASEL

SSEL

XSEL

Pulse Motor

Servo Motor (24V)

Servo Motor (200V)

Linear Servo Motor